

ROADX
TYRE

PASSENGER & LIGHT TRUCK TYRES

CATALOGUE

ROADX
TYRE

Roadx Headquarters
No. 43 Zhengzhou Road,
Shibei District, Qingdao, China
+86 400 660 8329

REV 21.01



CONTENTS

HP	H11 H12	05-06 07-05
UHP	U11 U11 RFT/SU01 RFT/H12 RFT	09-12 13-14
ALL-SEASON	4S	15-16
SUV	SU01 H/T01 H/T02	17-18 19-20 21-22
AT	AT	23-24
MT	M/T	25-26
LTC	C02 C01	27-28 29-30
WINTER	WH01	31-32
WINTER	WU01	33-34
WINTER	WH03	35-36
WINTER	WH02	37-38
WINTER	WH12	39-40
WINTER	WC01	41-42
WINTER	WCS01	43-44


05
RXMOTION

17
RXQUEST

31
RXFROST


RXMOTION

PRODUCT POSITIONING

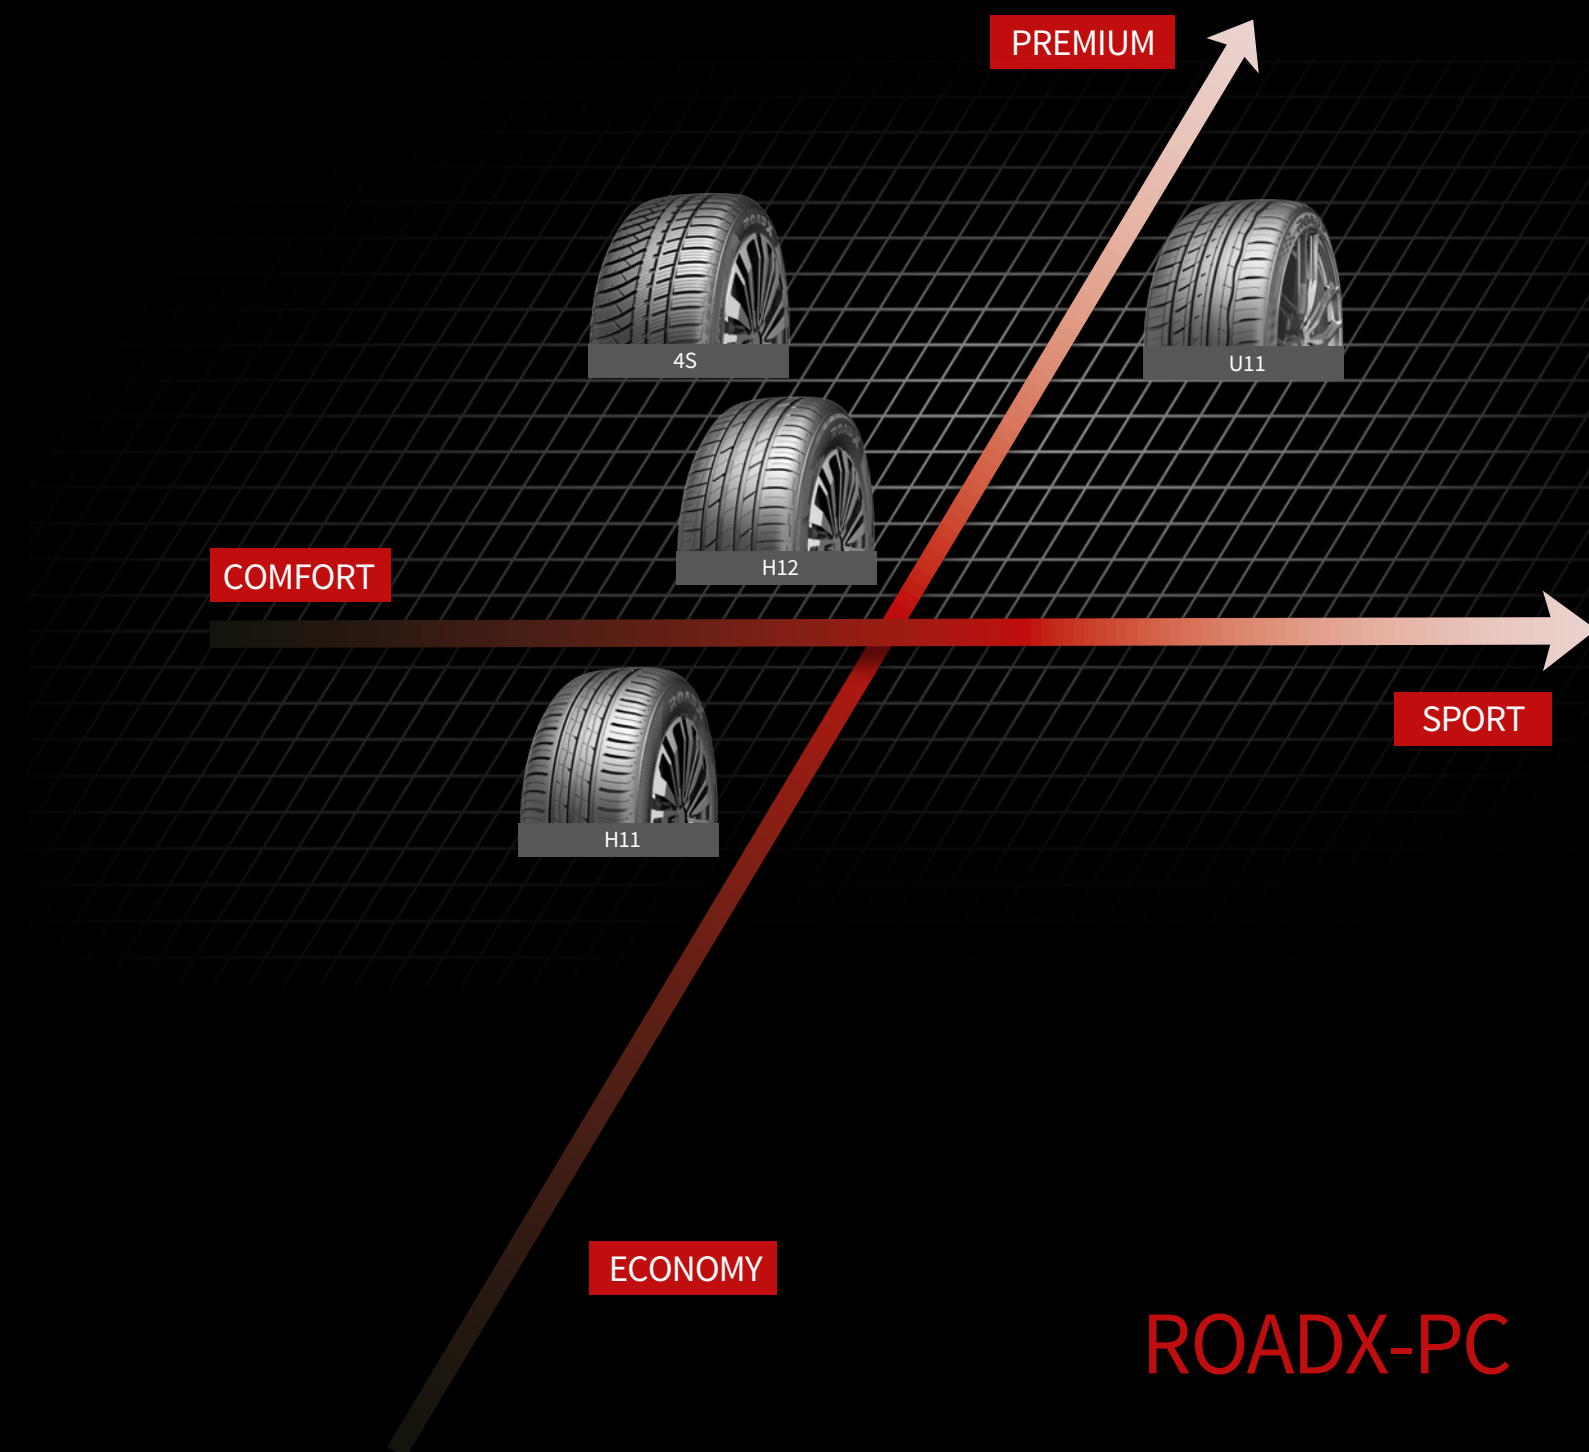

ROADX-PC

RXQUEST

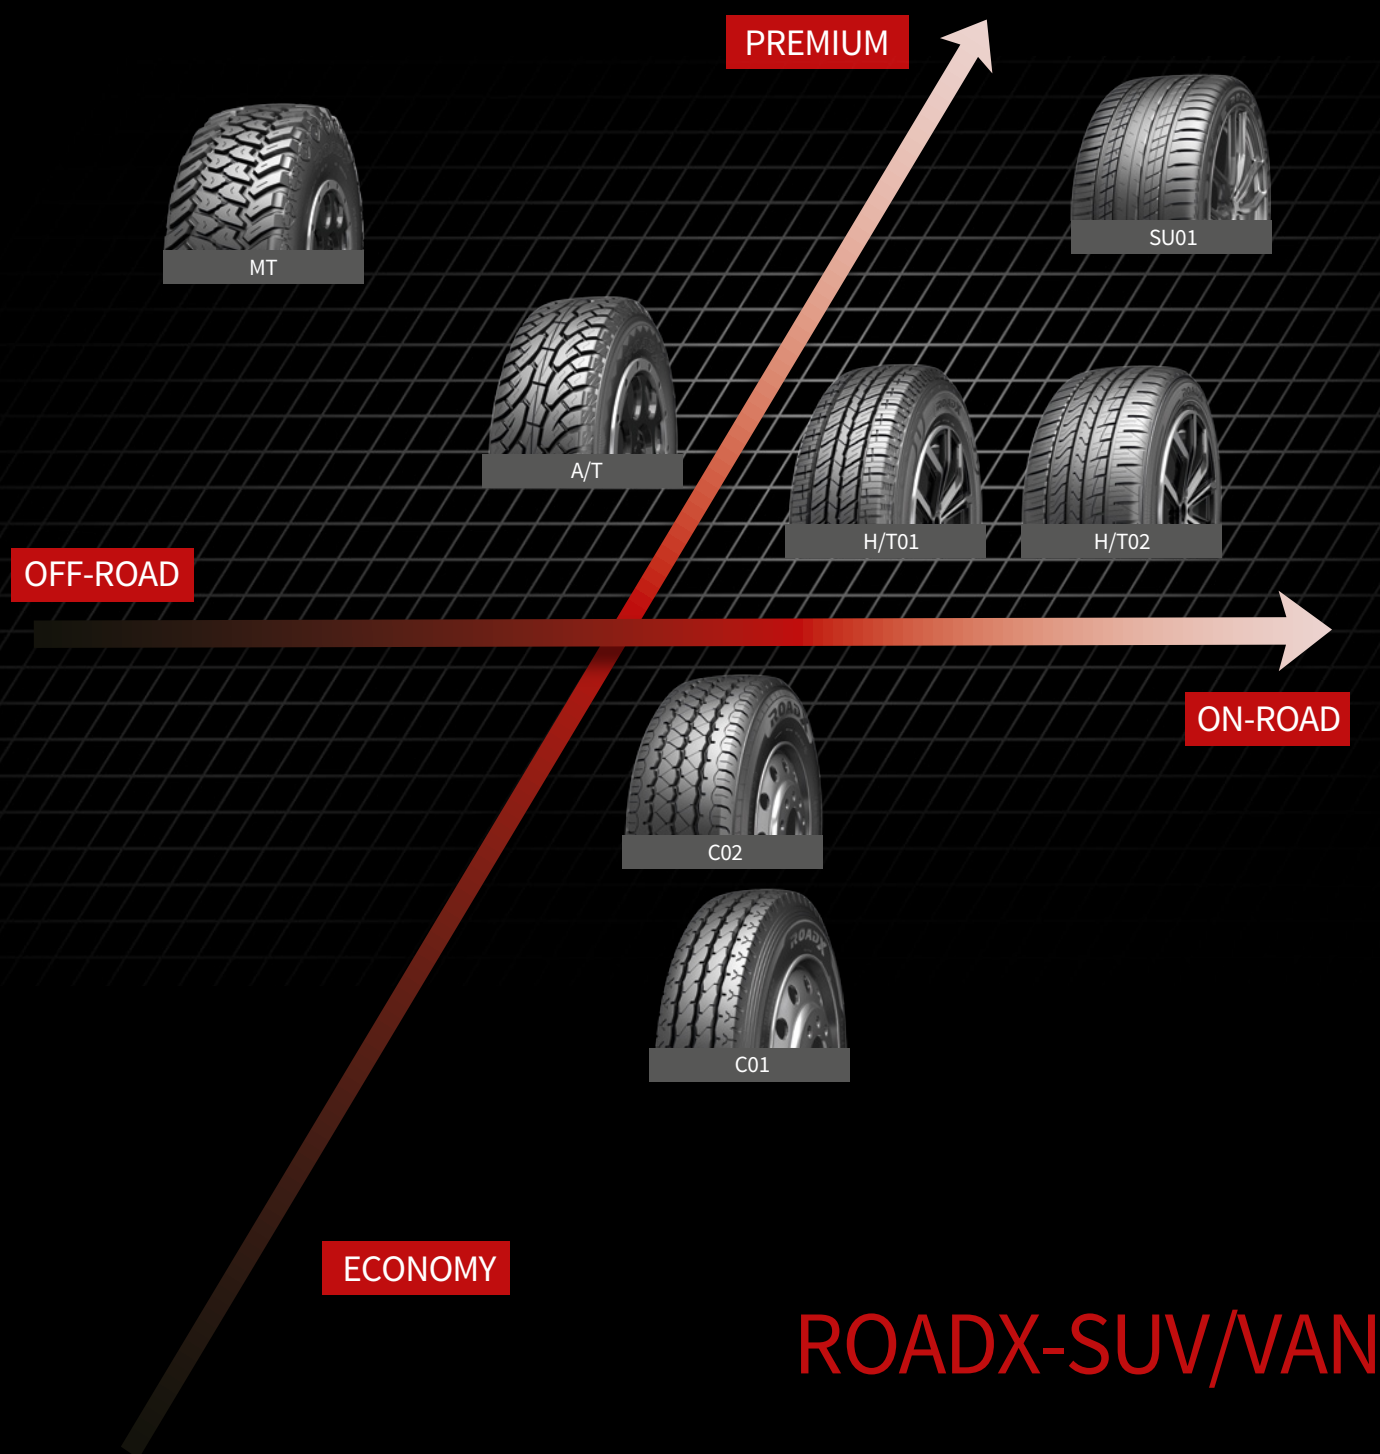

RXFROST



H11

HP

Designed with eco-friendly compounds to improve fuel efficiency and service life.



ECONOMICAL



HANDLING



COMFORT



DRAINAGE



Handling

Closed shoulder design strengthens shoulder blocks for superior handling performance.



Wet Performance

Main tread grooves and sipes effectively drain water to improve grip and safety on wet roads.



Handling

Two central ribs and solid shoulder blocks improve handling for greater driving stability.




RIM	SIZE	LI	SR	XL	TREAD DEPTH (mm)	STANDARD RIM	SECTION WIDTH (mm)	OVERALL DIAMETER (mm)	PRESSURE (kpa)	SW	RR	WG	NG Db	NG	Rim Protector
13	155/65R13	73	T		7,3	4.50B	155	532	300	BSW	E	B	70	2	NO
	165/80R13	83	T		7,2	4.50B	165	594	300	BSW	E	C	70	2	NO
	155/80R13	79	T		7	4.50B	155	578	300	BSW	E	C	70	2	NO
	165/70R13	79	T		7,2	5.00B	165	562	300	BSW	E	C	70	2	NO
	155/70R13	75	T		7	4.50B	155	548	300	BSW	E	C	70	2	NO
	165/65R13	77	T		7,2	5.00B	165	544	300	BSW	E	C	70	2	NO
	175/70R13	82	T		7,2	5.00B	175	576	300	BSW	E	C	70	2	NO
	185/70R13	86	T		7,4	5.50B	185	590	300	BSW	E	C	70	2	NO
	145/80R13	75	T		7	4.00B	145	562	300	BSW	E	C	70	2	NO
	165/70R13	83	T	XL	7,2	5.00B	165	562	340	BSW	E	C	71	2	NO
14	195/60R14	86	H		8	6J	195	590	300	BSW	E	B	71	2	NO
	165/80R14	85	T		7,2	4 1/2J	165	620	300	BSW	E	C	70	2	NO
	165/60R14	75	H		7,2	5J	165	554	300	BSW	E	C	70	2	NO
	175/65R14	86	T	XL	7,2	5J	175	584	340	BSW	E	C	71	2	NO
	185/60R14	82	H		7,4	5 1/2J	185	578	300	BSW	E	C	70	2	NO
	185/65R14	86	H		7,4	5 1/2J	185	596	300	BSW	E	C	70	2	NO
	195/65R14	89	H		7,4	6J	195	610	300	BSW	E	B	71	2	NO
	165/65R14	79	T		7,2	5J	165	570	300	BSW	E	C	70	2	NO
	165/70R14	85	T	XL	7,2	5J	165	588	340	BSW	E	C	71	2	NO
	185/70R14	88	T		7,4	5 1/2J	185	616	300	BSW	E	C	70	2	NO
	195/70R14	91	T		7,4	6J	195	630	300	BSW	E	B	71	2	NO
	155/65R14	75	T		7	4 1/2J	155	558	300	BSW	E	C	70	2	NO
	175/70R14	88	T	XL	7,2	5J	175	602	340	BSW	E	B	71	2	NO
	165/70R14	81	T		7,2	5J	165	588	300	BSW	E	C	70	2	NO
	175/65R14	82	T		7,2	5J	175	584	300	BSW	E	C	70	2	NO
	175/70R14	84	T		7,2	5J	175	602	300	BSW	E	C	70	2	NO
	185/70R14	88	H		7,4	5 1/2J	185	616	300	BSW	E	C	70	2	NO
15	165/60R15	77	H		7,2	5J	165	554	300	BSW	E	C	70	2	NO

1inch=25.4mm | 1kPa=0.142psi | 1KG≈2.2 lbs | XL Extra Load | LI Load Index | SS Speed Symbol

H12

HP

Designed for safety and performance on both wet and dry roads.



High-Speed Performance

Asymmetric pattern design maximizes the tyre's contact footprint area for greater cornering and high-speed driving stability on dry roads.



Driving Safety

Tread groove design effectively drains water and disperses heat.



Wet Performance

Tread sipes effectively break through water film to improve handling and grip on wet roads.



RIM	SIZE	LI	SR	XL	TREAD DEPTH (mm)	STANDARD RIM	SECTION WIDTH (mm)	OVERALL DIAMETER (mm)	PRESSURE (kpa)	SW	RR	WG	NG Db	NG	Rim Protector
14	185/55R14	80	V		7,4	6J	185	560	300	BSW	E	B	70	2	YES
	205/70R14	98	T	XL	7,7	6J	205	644	340	BSW	C	C	71	2	NO
15	175/55R15	77	H		7,6	5 1/2J	175	573	300	BSW	E	C	70	2	YES
	195/55R15	85	V		7,4	6J	195	595	300	BSW	E	C	71	2	YES
	185/60R15	88	H	XL	7,4	5 1/2J	185	603	340	BSW	E	B	71	2	NO
	185/65R15	92	H	XL	7,4	5 1/2J	185	621	340	BSW	C	B	71	2	NO
	195/60R15	88	H		7,4	6J	195	615	300	BSW	E	C	71	2	NO
	195/65R15	91	V		7,4	6J	195	635	300	BSW	E	C	71	2	NO
	205/65R15	94	V		7,7	6J	205	647	300	BSW	C	C	71	2	NO
	205/70R15	96	H		7,7	6J	205	669	300	BSW	C	C	71	2	NO
	215/70R15	98	H		7,7	6 1/2J	215	683	300	BSW	C	C	71	2	NO
	165/65R15	81	H		7,2	5J	165	595	300	BSW	E	C	70	2	NO
	215/65R15	96	V		7,7	6 1/2J	215	661	300	BSW	C	C	71	2	NO
	225/60R15	96	V		7,7	6 1/2J	225	651	300	BSW	C	C	71	2	NO
	195/50R15	82	V		7,4	6J	195	577	300	BSW	E	C	71	2	YES
	205/50R15	89	V	XL	7,7	6 1/2J	205	587	340	BSW	E	C	71	2	YES
	195/45R15	78	W		7,4	6 1/2J	195	557	300	BSW	E	C	71	2	YES
	175/65R15	88	H	XL	7,2	5J	175	609	340	BSW	E	C	71	2	NO
	185/55R15	82	V		7,4	6J	185	585	300	BSW	E	B	70	2	YES
	205/60R15	95	V	XL	7,7	6J	205	627	340	BSW	C	C	71	2	NO
	215/60R15	98	V	XL	7,7	6 1/2J	215	639	340	BSW	C	C	71	2	NO
	195/65R15	95	H	XL	7,4	6J	195	635	340	BSW	C	B	71	2	NO
16	175/65R15	84	H		7,2	5J	175	609	300	BSW	E	C	70	2	NO
	185/60R15	84	H		7,4	5 1/2J	185	603	300	BSW	E	B	70	2	NO
	185/65R15	88	H		7,4	5 1/2J	185	621	300	BSW	E	B	70	2	NO
	195/60R15	88	V		7,4	6J	195	615	300	BSW	E	C	71	2	NO
	195/65R15	91	H		7,4	6J	195	635	300	BSW	E	C	71	2	NO
	175/65R15	84	T		7,2	5J	175	609	300	BSW	E	C	70	2	NO
	235/60R16	100	V		8	7J	235	688	300	BSW	C	C	71	2	NO
	205/45R16	87	W	XL	8	7J	205	590	340	BSW	E	C	71	2	YES
	195/60R16	89	V		7,4	6J	195	640	300	BSW	E	C	71	2	NO
	205/60R16	96	V	XL	7,7	6J	205	652	340	BSW	C	C	71	2	NO
	215/60R16	95	V		7,7	6 1/2J	215	664	300	BSW	C	C	71	2	NO
	205/65R16	95	H		7,7	6J	205	672	300	BSW	C	C	71	2	NO
	205/55R16	91	V		7,7	6 1/2J	205	632	300	BSW	E	C	71	2	YES
	185/55R16	83	V		7,4	6J	185	610	300	BSW	E	B	70	2	YES
	195/50R16	88	V	XL	7,4	6J	195	602	340	BSW	E	C	71	2	YES
	195/45R16	84	W	XL	7,4	6 1/2J	195	582	340	BSW	E	C	71	2	YES
	215/65R16	98	H		7,7	6 1/2J	215	686	300	BSW	C	C	71	2	NO
	225/60R16	102	V	XL	7,7	6 1/2J	225	676	340	BSW	C	C	71	2	NO
	195/55R16	91	V	XL	7,4	6J	195	620	340	BSW	E	C	71	2	YES
	195/55R16	87	V		7,4	6J	195	620	300	BSW	E	C	71	2	YES
18	205/55R16	94	V	XL	7,7	6 1/2J	205	632	340	BSW	C	C	71	2	YES
	205/60R16	92	V		7,7	6J	205	652	300	BSW	C	C	71	2	NO
	185/55R16	87	V	XL	7,4	6J	185	610	340	BSW	E	B	70	2	YES
	195/45R16	84	V	XL	7,4	6 1/2J	195	582	340	BSW	E	C	71	2	YES
	215/60R16	99	V	XL	7,7	6 1/2J	215	664	340	BSW	C	C	71	2	NO
	215/55R18	99	V	XL	7,7	7J	215	693	340	BSW	C	C	71	2	YES

U11

UHP

Innovative high performance tyre that combines comfort and greater fuel economy.



Fuel Economy

The tread compound effectively reduces rolling resistance for greater fuel economy.



Driving Comfort

The varied pitch design better absorbs vibrations to improve driving comfort.



Overall Performance

The asymmetric tread pattern improves grip and handling for more responsive steering and braking.



Wet Performance

Tread pattern design effectively expels water to allow for greater grip and handling on wet roads.

RIM	SIZE	LI	SR	XL	TREAD DEPTH (mm)	STANDARD RIM	SECTION WIDTH (mm)	OVERALL DIAMETER (mm)	PRESSURE (kpa)	SW	RR	WG	NG Db	NG	Rim Protector
15	185/45ZR15	75	Y		7,5	6J	185	547	300	BSW	E	C	70	2	YES
	205/55ZR16	94	W	XL	8,2	6 1/2J	205	632	340	BSW	E	C	72	2	YES
16	215/55ZR16	97	W	XL	8,2	7J	215	642	340	BSW	E	C	72	2	YES
	225/55ZR16	99	W	XL	8,2	7J	225	654	340	BSW	E	C	72	2	YES
	205/50ZR16	87	W		8	6 1/2J	205	612	300	BSW	E	C	71	2	YES
	215/45ZR16	90	Y	XL	7,5	7J	215	600	340	BSW	E	C	72	2	YES
	215/45R16	90	V	XL	7,5	7J	215	600	340	BSW	E	C	72	2	YES
	225/55ZR16	99	Y	XL	8,2	7J	225	654	340	BSW	E	C	72	2	YES
	225/50ZR17	98	W	XL	8,2	7J	225	658	340	BSW	E	C	72	2	YES
	225/55ZR17	101	W	XL	8,2	7J	225	680	340	BSW	E	C	72	2	YES
17	235/45ZR17	97	W	XL	8,2	8J	235	644	340	BSW	E	C	72	2	YES
	205/45ZR17	88	W	XL	8	7J	205	616	340	BSW	E	C	72	2	YES
	205/50ZR17	93	W	XL	8	6 1/2J	205	638	340	BSW	E	C	72	2	YES
	215/50ZR17	95	W	XL	8	7J	215	648	340	BSW	E	C	72	2	YES
	225/45ZR17	94	W	XL	8	7 1/2J	225	634	340	BSW	E	C	72	2	YES
	205/40ZR17	84	W	XL	8	7 1/2J	205	596	340	BSW	E	C	71	2	YES
	215/55ZR17	94	W		8	7J	215	668	300	BSW	E	C	71	2	YES
	245/40ZR17	95	W	XL	8	8 1/2J	245	628	340	BSW	E	C	71	2	YES
	205/55ZR17	95	Y	XL	7,5	6 1/2J	205	658	340	BSW	E	C	71	2	YES
	215/40ZR17	87	Y	XL	7,5	7 1/2J	215	604	340	BSW	E	C	72	2	YES
	195/40ZR17	81	Y	XL	7,5	7J	195	588	340	BSW	E	C	72	2	YES
	245/45ZR17	99	Y	XL	7,5	8J	245	652	340	BSW	C	C	71	2	YES
	195/45ZR17	85	Y	XL	7,5	6 1/2J	195	608	340	BSW	E	C	72	2	YES
	235/50ZR17	100	Y	XL	7,5	7 1/2J	235	668	340	BSW	C	C	72	2	YES
	215/45ZR17	91	W	XL	8	7J	215	626	340	BSW	E	C	72	2	YES
	185/45ZR17	82	Y	XL	7,5	6J	185	598	340	BSW	E	C	71	2	YES
	215/55ZR17	98	W	XL	8	7J	215	668	340	BSW	E	C	71	2	YES

1inch=25.4mm | 1kPa=0.142psi | 1KG≈2.2 lbs | XL Extra Load | LI Load Index | SS Speed Symbol



U11

RIM	SIZE	LI	SR	XL	TREAD DEPTH (mm)	STANDARD RIM	SECTION WIDTH (mm)	OVERALL DIAMETER (mm)	PRESSURE (kpa)	SW	RR	WG	NG Db	NG	Rim Protector
18	225/40ZR18	92	W	XL	8	8J	225	637	340	BSW	E	C	71	2	YES
	225/45ZR18	95	W	XL	8	7 1/2J	225	659	340	BSW	E	C	72	2	YES
	235/40ZR18	95	W	XL	8	8 1/2J	235	645	340	BSW	E	C	71	2	YES
	245/40ZR18	97	Y	XL	8	8 1/2J	245	653	340	BSW	E	C	71	2	YES
	245/45ZR18	100	W	XL	8	8J	245	677	340	BSW	C	C	71	2	YES
	255/35ZR18	94	Y	XL	8	9J	255	635	340	BSW	E	C	73	2	YES
	215/35ZR18	84	Y	XL	7,5	7 1/2J	215	607	340	BSW	E	C	72	2	YES
	215/40ZR18	89	Y	XL	7,5	7 1/2J	215	629	340	BSW	E	C	72	2	YES
	235/45ZR18	98	Y	XL	7,5	8J	235	669	340	BSW	E	C	72	2	YES
	275/40ZR18	103	Y	XL	7,5	9 1/2J	275	677	340	BSW	C	C	73	2	YES
	215/45ZR18	93	Y	XL	7,5	7J	215	651	340	BSW	E	C	72	2	YES
	255/45ZR18	103	Y	XL	7,5	8 1/2J	255	687	340	BSW	C	C	73	2	YES
	225/35ZR18	87	Y	XL	7,5	8J	225	615	340	BSW	E	C	72	2	YES
	235/35ZR18	90	Y	XL	7,5	8 1/2J	235	621	340	BSW	E	C	71	2	YES
	245/35ZR18	92	Y	XL	7,5	8 1/2J	245	629	340	BSW	E	C	71	2	YES
	255/40ZR18	99	Y	XL	7,5	9J	255	661	340	BSW	E	C	73	2	YES
	265/35ZR18	97	Y	XL	7,5	9 1/2J	265	643	340	BSW	C	C	73	2	YES
	235/50ZR18	101	W	XL	7,5	7 1/2J	235	693	340	BSW	B	C	72	2	YES
	245/45ZR18	100	Y	XL	8	8J	245	677	340	BSW	C	C	71	2	YES
	245/50R18	104	V	XL	8	7 1/2J	245	703	340	BSW	/	/	/	/	YES
19	235/35ZR19	91	Y	XL	8	8 1/2J	235	647	340	BSW	E	C	71	2	YES
	245/35ZR19	93	Y	XL	8	8 1/2J	245	655	340	BSW	E	C	71	2	YES
	255/35ZR19	96	Y	XL	8	9J	255	661	340	BSW	E	C	73	2	YES
	255/50ZR19	107	Y	XL	8	8J	255	739	340	BSW	C	C	73	2	YES
	275/30ZR19	96	Y	XL	8	9 1/2J	275	649	340	BSW	E	C	73	2	YES
	275/35ZR19	100	Y	XL	8	9 1/2J	275	675	340	BSW	C	C	73	2	YES
	285/45ZR19	111	Y	XL	8	9 1/2J	285	739	340	BSW	C	C	73	2	YES
	265/30ZR19	93	Y	XL	8	9 1/2J	265	643	340	BSW	E	C	73	2	YES
	245/40ZR19	98	Y	XL	8	8 1/2J	245	679	340	BSW	E	C	71	2	YES
	225/40ZR19	93	Y	XL	7,5	8J	225	663	340	BSW	E	C	72	2	YES

1inch=25.4mm | 1kPa=0.142psi | 1KG≈2.2 lbs | XL Extra Load | LI Load Index | SS Speed Symbol

U11

RIM	SIZE	LI	SR	XL	TREAD DEPTH (mm)	STANDARD RIM	SECTION WIDTH (mm)	OVERALL DIAMETER (mm)	PRESSURE (kpa)	SW	RR	WG	NG Db	NG	Rim Protector
19	225/35ZR19	88	Y	XL	7,5	8J	225	641	340	BSW	E	C	72	2	YES
	235/40ZR19	96	Y	XL	7,5	8 1/2J	235	671	340	BSW	C	C	71	2	YES
	275/40ZR19	105	Y	XL	7,5	9 1/2J	275	703	340	BSW	C	C	73	2	YES
	215/35ZR19	85	Y	XL	7,5	7 1/2J	215	633	340	BSW	E	C	72	2	YES
	245/45ZR19	102	Y	XL	7,5	8J	245	703	340	BSW	C	C	71	2	YES
	255/30ZR19	91	Y	XL	7,5	9J	255	637	340	BSW	E	C	73	2	YES
	235/45ZR19	99	Y	XL	7,5	8J	235	695	340	BSW	C	C	72	2	YES
	265/35ZR19	98	Y	XL	7,5	9 1/2J	265	669	340	BSW	C	C	73	2	YES
	275/45ZR19	108	Y	XL	7,5	9J	275	731	340	BSW	C	C	73	2	YES
	255/45ZR19	104	W	XL	8	8 1/2J	255	713	340	BSW	C	C	73	2	YES
20	275/40ZR20	106	Y	XL	8	9 1/2J	275	728	340	BSW	C	C	73	2	YES
	315/35ZR20	110	Y	XL	8	11J	315	728	340	BSW	C	C	73	2	YES
	245/40ZR20	99	Y	XL	7,5	8 1/2J	245	704	340	BSW	C	C	71	2	YES
	245/35ZR20	95	Y	XL	7,5	8 1/2J	245	680	340	BSW	E	C	71	2	YES
	255/35ZR20	97	Y	XL	7,5	9J	255	686	340	BSW	E	C	73	2	YES
	255/40ZR20	101	Y	XL	7,5	9J	255	712	340	BSW	C	C	73	2	YES
	275/35ZR20	102	Y	XL	7,5	9 1/2J	275	700	340	BSW	C	C	73	2	YES
	295/35ZR20	105	Y	XL	7,5	10 1/2J	295	714	340	BSW	C	C	73	2	YES
	275/45ZR20	110	Y	XL	8	9J	275	756	340	BSW	B	C	73	2	YES
	225/30ZR20	85	Y	XL	7,5	8J	225	644	340	BSW	E	C	72	2	YES
	265/50ZR20	111	Y	XL	7,5	8 1/2J	265	774	340	BSW	C	C	73	2	YES
21	325/30ZR21	108	Y	XL	8	11 1/2J	325	729	340	BSW	C	C	73	2	YES
	285/35ZR21	105	Y	XL	8	10J	285	733	340	BSW	C	C	73	2	YES
	295/35ZR21	107	Y	XL	8	10 1/2J	295	739	340	BSW	C	C	73	2	YES
	265/40ZR22	106	Y	XL	7,5	9 1/2J	265	771	340	BSW	C	C	73	2	YES


1inch=25.4mm | 1kPa=0.142psi | 1KG≈2.2 lbs | XL Extra Load | LI Load Index | SS Speed Symbol

RUN FLAT

NEW TECHNOLOGY


NEW TECHNOLOGY GREATER SAFETY
H12 RFT / SU01 RFT / U11 RFT

U11 RFT SU01 RFT H12 RFT

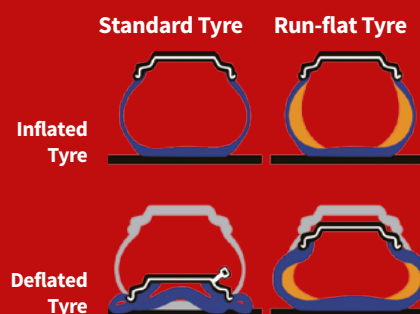

RFT Product Features

1. No more delays or being stranded on remote highways due to a flat tyre. RFT products will continue to drive at up to 80 KPH without having to be replaced immediately.
2. Helps to avoid accidents caused by the loss of control from punctures or air leaks, increasing overall safety.
3. Even when the tyre begins leaking air you can drive to your local tyre dealer to have it repaired. RFT technology also means there is no need to carry a spare which helps increase storage space within the vehicle.

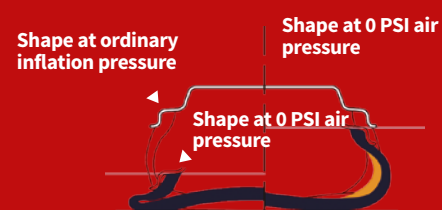

Run-flat tyres (RFT), also known as “self-supporting run-flat tyres,” are an important safety feature for any vehicle. A Run-flat tyre is built with a thicker sidewall to help support the tyre shape after losing air. This allows the tyre to continue to run safely, but at a limited speed and mileage. When normal tyres are punctured, they can instantly lead to a severe sidewall collapse; in the event of a collapse, the vehicle loses its only support which can cause the vehicle's center of gravity to change instantaneously. RFT helps to lessen the severity of a flat tyre and allows you to get to the closest destination safely.

RIM	SIZE	LI	SR	XL	TREAD DEPTH (mm)	STANDARD RIM	SECTION WIDTH (mm)	OVERALL DIAMETER (mm)	PRESSURE (kpa)	SW	RR	WG	NG Db	NG	Rim Protector
SU01 RFT															
16	205/55ZRF16	94	W	XL	8,2	6 1/2J	205	632	340	BSW	E	C	72	2	YES
	225/55ZRF16	99	W	XL	8,2	7J	225	654	340	BSW	E	C	72	2	YES
17	225/45ZRF17	94	W	XL	8	7 1/2J	225	634	340	BSW	E	C	72	2	YES
	205/45ZRF17	88	W	XL	8	7J	205	616	340	BSW	E	C	72	2	YES
	205/50ZRF17	93	W	XL	8	6 1/2J	205	638	340	BSW	E	C	72	2	YES
	225/50ZRF17	98	W	XL	8,2	7J	225	658	340	BSW	E	C	72	2	YES
	225/55ZRF17	101	W	XL	8,2	7J	225	680	340	BSW	E	C	72	2	YES
	205/55RF17	91	V		7,5	6 1/2J	205	658	300	BSW	/	/	/	/	YES
18	225/40ZRF18	92	W	XL	8	8J	225	637	340	BSW	E	C	71	2	YES
	255/35ZRF18	94	Y	XL	8	9J	255	635	340	BSW	E	C	73	2	YES
	245/50ZRF18	100	Y		8	7 1/2J	245	703	300	BSW	C	C	71	2	YES
	245/45ZRF18	100	W	XL	8	8J	245	677	340	BSW	C	C	71	2	YES
	245/40ZRF18	97	Y	XL	8	8 1/2J	245	653	340	BSW	E	C	72	2	YES
	225/45ZRF18	95	W	XL	8	7 1/2J	225	659	340	BSW	E	C	71	2	YES
	215/40ZRF18	85	Y		7,5	7 1/2J	215	629	300	BSW	/	/	/	/	YES
	245/35ZRF18	92	Y	XL	7,5	8 1/2J	245	629	340	BSW	E	C	72	2	YES
	245/40ZRF19	98	Y	XL	8	8 1/2J	245	679	340	BSW	E	C	71	2	YES
19	275/35ZRF19	100	Y	XL	8	9 1/2J	275	675	340	BSW	E	C	73	2	YES
	255/50RF19	103	V		8	8J	255	739	300	BSW	C	C	72	2	YES
	235/45ZRF19	99	W	XL	7,5	8J	235	695	340	BSW	E	C	72	2	YES
	245/45ZRF19	102	W	XL	7,5	8J	245	703	340	BSW	C	C	71	2	YES
	275/40ZRF19	101	W		7,5	9 1/2J	275	703	300	BSW	C	C	72	2	YES
	245/45ZRF19	98	Y		7,5	8J	245	703	300	BSW	/	/	/	/	YES
	275/40ZRF19	101	Y		7,5	9 1/2J	275	703	300	BSW	/	/	/	/	YES
	225/40ZRF19	89	W		7,5	8J	225	663	300	BSW	E	C	71	2	YES
	255/30ZRF19	91	Y	XL	7,5	9J	255	637	340	BSW	/	/	/	/	YES
	255/35ZRF19	96	Y	XL	8	9J	255	661	340	BSW	/	/	/	/	YES

SU01 RFT															
18	255/55RF18	105	H		8	8J	255	737	300	BSW	C	A	72	2	YES
	235/50RF18	97	V		8	7 1/2J	235	693	300	BSW	E	A	71	2	YES

H12 RFT															
16	195/55RF16	91	V	XL	7,4	6J	195	620	340	BSW	E	C	71	2	YES

4S

ALL-SEASON

Special all-season product for Europe.



Safety

New sipe designs greatly improve grip and braking responsiveness.

Driving Comfort

Tread design is optimized for a comfortable drive year-round.

Overall Performance

New groove design pattern greatly improves handling and stability.



Inner Pattern

Improved handling in snow and rain

Outer Pattern

Handling performance and stability in dry conditions

RIM	SIZE	LI	SR	XL	TREAD DEPTH (mm)	STANDARD RIM	SECTION WIDTH (mm)	OVERALL DIAMETER (mm)	PRESSURE (kpa)	SW	RR	WG	NG Db	NG	Rim Protector
13	155/70R13	75	T	/	8	4.50B	155	548	300	BSW	E	C	71	2	YES
	155/80R13	79	T	/	8	4.50B	155	578	300	BSW	E	C	71	2	YES
14	175/65R14	82	T	/	8,5	5J	175	584	300	BSW	E	C	71	2	YES
	155/65R14	75	T	/	8	4 1/2J	155	558	300	BSW	E	C	71	2	YES
	165/70R14	85	T	XL	8	5J	165	588	340	BSW	E	C	71	2	YES
	185/60R14	82	T	/	8,5	5 1/2J	185	578	300	BSW	E	C	71	2	YES
	185/65R14	86	T	/	8,5	5 1/2J	185	596	300	BSW	E	C	71	2	YES
	165/65R14	79	T	/	8	5J	165	570	300	BSW	E	C	71	2	YES
	165/60R14	79	H	XL	8	5J	165	554	340	BSW	E	C	71	2	YES
	175/70R14	84	T	/	8,5	5J	175	602	300	BSW	E	C	71	2	YES
	175/70R14	88	T	XL	8,5	5J	175	602	340	BSW	E	C	71	2	YES
15	185/65R15	88	H	/	8,5	5 1/2J	185	621	300	BSW	E	C	71	2	YES
	185/60R15	88	H	XL	8,5	5 1/2J	185	603	340	BSW	E	C	71	2	YES
	195/65R15	91	H	/	8,5	6J	195	635	300	BSW	E	C	71	2	YES
	195/60R15	88	H	/	8,5	6J	195	615	300	BSW	E	C	71	2	YES
	195/50R15	82	H	/	8,5	6J	195	577	300	BSW	E	C	71	2	YES
	195/55R15	85	H	/	8,5	6J	195	595	300	BSW	E	C	71	2	YES
	175/65R15	84	H	/	8,5	5J	175	609	300	BSW	E	C	71	2	YES
	185/55R15	82	H	/	8,5	6J	185	585	300	BSW	E	C	71	2	YES
	185/65R15	92	T	XL	8,5	5 1/2J	185	621	340	BSW	E	C	71	2	YES
	205/55R16	94	H	XL	8,5	6 1/2J	205	632	340	BSW	E	B	71	2	YES
16	205/55R16	94	V	XL	8,5	6 1/2J	205	632	340	BSW	E	B	71	2	YES
	195/55R16	87	V	/	8,5	6J	195	620	300	BSW	E	C	71	2	YES
	205/45R16	87	V	XL	8,5	7J	205	590	340	BSW	E	C	71	2	YES
	205/60R16	96	V	XL	8,5	6J	205	652	340	BSW	E	B	72	2	YES
	215/55R16	97	V	XL	8,5	7J	215	642	340	BSW	E	B	72	2	YES
	215/60R16	99	V	XL	8,5	6 1/2J	215	664	340	BSW	C	B	72	2	YES
	225/55R16	99	V	XL	8,5	7J	225	654	340	BSW	C	B	72	2	YES
17	225/45R17	94	V	XL	8,5	7 1/2J	225	634	340	BSW	E	B	72	2	YES
	205/50R17	93	V	XL	8,5	6 1/2J	205	638	340	BSW	E	C	71	2	YES
	225/50R17	98	V	XL	8,5	7J	225	658	340	BSW	C	B	72	2	YES

1inch=25.4mm | 1kPa=0.142psi | 1KG≈2.2 lbs | XL Extra Load | LI Load Index | SS Speed Symbol

SU01

SUV

Specially designed UHP SUV tyre.



Summer Performance

The asymmetric tread pattern improves handling and braking on wet and dry roads.



Safety

The center rib design improves traction for greater acceleration and braking responsiveness, overall increasing safety.

Durability

The tread compound is designed specifically to improve wear resistance.

Driving Comfort

Variable tread block pitch and sipe design reduce tyre vibrations offering a more comfortable driving experience.




RIM	SIZE	LI	SR	XL	TREAD DEPTH (mm)	STANDARD RIM	SECTION WIDTH (mm)	OVERALL DIAMETER (mm)	PRESSURE (kPa)	SW	RR	WG	NG Db	NG	Rim Protector
17	235/55R17	103	W	XL	8	7 1/2J	235	690	340	BSW	E	A	72	2	YES
18	235/50R18	97	V	/	8	7 1/2J	235	693	300	BSW	E	A	72	2	YES
	235/55R18	104	W	XL	8	7 1/2J	235	715	340	BSW	E	A	72	2	YES
	235/60R18	107	W	XL	8	7J	235	739	340	BSW	C	A	72	2	YES
	225/55R18	102	W	XL	8	7J	225	705	340	BSW	E	A	72	2	YES
	225/60R18	100	V	/	8	6 1/2J	225	727	300	BSW	E	A	72	2	YES
	245/60R18	105	V	/	8	7J	245	751	300	BSW	E	A	71	2	YES
	265/60R18	110	V	/	8	8J	265	775	300	BSW	C	A	71	2	YES
	255/60R18	112	V	XL	8	7 1/2J	255	763	340	BSW	C	A	72	2	YES
	255/55R18	109	Y	XL	8	8J	255	737	340	BSW	C	A	72	2	YES
	275/40R18	103	W	XL	8	9 1/2J	275	677	340	BSW	E	A	71	2	YES
	225/55R18	102	V	XL	8	7J	225	705	340	BSW	C	B	72	2	YES
19	245/55R19	103	V	/	8	7 1/2J	245	753	300	BSW	E	A	71	2	YES
	235/55R19	101	W	/	8	7 1/2J	235	741	300	BSW	E	A	71	2	YES
	265/50R19	110	Y	XL	8	8 1/2J	265	749	340	BSW	C	A	71	2	YES
	255/55R19	111	Y	XL	8	8J	255	763	340	BSW	C	A	72	2	YES
	225/55R19	99	W	/	8	7J	225	731	300	BSW	C	B	71	2	YES
	225/45R19	96	W	XL	8	7 1/2J	225	685	340	BSW	C	B	72	2	YES
20	255/55R20	110	Y	XL	8	8J	255	788	340	BSW	C	A	72	2	YES
	275/60R20	119	V	XL	8	8J	275	838	340	BSW	C	A	71	2	YES
	275/55R20	117	W	XL	8	8 1/2J	275	810	340	BSW	C	A	71	2	YES
	265/50R20	111	Y	XL	8	8 1/2J	265	774	340	BSW	C	A	71	2	YES
	285/50R20	116	W	XL	8	9J	285	794	340	BSW	C	A	73	2	YES
	285/40R20	104	Y	/	8	10J	285	736	300	BSW	E	A	73	2	YES
	275/35R20	102	W	XL	8	9 1/2J	275	700	340	BSW	E	A	71	2	YES
	295/35R20	105	Y	XL	8	10 1/2J	295	714	340	BSW	E	A	73	2	YES
	255/40R20	101	Y	XL	8	9J	255	712	340	BSW	E	A	72	2	YES
	255/45R20	105	Y	XL	8	8 1/2J	255	738	340	BSW	C	A	71	2	YES
	255/50R20	109	Y	XL	8	8J	255	764	340	BSW	B	A	71	2	YES
21	275/45R21	110	Y	XL	8	9J	275	781	340	BSW	C	A	71	2	YES
22	305/40R22	114	W	XL	8	11J	305	803	340	BSW	C	A	73	2	YES
	285/45R22	114	W	XL	8	9 1/2J	285	815	340	BSW	C	A	73	2	YES
	305/45R22	118	W	XL	8	10J	305	833	340	BSW	C	A	73	2	YES

1inch=25.4mm | 1kPa=0.142psi | 1KG≈2.2 lbs | XL Extra Load | LI Load Index | SS Speed Symbol

H/T01 SUV

Optimized high performance urban on and off-road pattern suitable for light trucks and SUVs with excellent endurance and low noise emissions.



WEAR RESISTANCE HANDLING CROSS-COUNTRY BRAKING



On & Off-Road Performance

The ladder-like design within the tread grooves improves tread strength, handling, and effectively reduces stone retention.

Wet Performance

Wide grooves effectively drain water for improved grip and handling on wet roads.

Driving Comfort

The precision spaced tread blocks and grooves effectively reduce tyre noise emissions



RIM	SIZE	LI	SR	XL	TREAD DEPTH (mm)	STANDARD RIM	SECTION WIDTH (mm)	OVERALL DIAMETER (mm)	PRESSURE (kpa)	SW	RR	WG	NG Db	NG	Rim Protector
14	205/75R14	95	S	/	9,5	5 1/2J	205	664	300	WR	E	E	71	2	NO
	215/75R14	100	S	/	9,5	6J	215	678	300	WR	E	C	71	2	NO
	205/70R15	96	T	/	9	6J	205	669	300	WR	E	E	71	2	NO
	205/75R15	97	T	/	9,5	5 1/2J	205	689	300	WR	E	C	71	2	NO
	215/70R15	98	T	/	9	6 1/2J	215	683	300	WR	E	C	71	2	NO
	215/75R15	100	S	/	9,2	6J	215	703	300	BSW	E	B	71	2	NO
	215/75R15	100	T	/	9,2	6J	215	703	300	BSW	E	B	71	2	NO
	215/75R15	100	T	/	9,2	6J	215	703	300	WR	E	C	71	2	NO
	225/70R15	100	T	/	9	6 1/2J	225	697	300	BSW	E	C	71	2	NO
	225/70R15	100	T	/	9	6 1/2J	225	697	300	WR	E	C	71	2	NO
	225/75R15	102	T	/	9,2	6J	225	719	300	BSW	E	C	71	2	NO
	225/75R15	102	T	/	9,2	6J	225	719	300	WR	E	C	71	2	NO
	235/75R15	105	S	/	9,5	6 1/2J	235	733	300	BSW	E	E	71	2	NO
	235/75R15	105	T	/	9,5	6 1/2J	235	733	300	BSW	E	E	71	2	NO
16	235/75R15	105	T	/	9,5	6 1/2J	235	733	300	WR	E	E	71	2	NO
	215/65R16	98	T	/	9	6 1/2J	215	686	300	BSW	E	C	71	2	NO
	215/70R16	100	T	/	9	6 1/2J	215	708	300	BSW	E	C	71	2	NO
	225/70R16	103	T	/	9	6 1/2J	225	722	300	BSW	E	C	71	2	NO
	235/70R16	106	T	/	9	7J	235	736	300	BSW	C	C	71	2	NO
	245/70R16	111	T	XL	9	7J	245	750	340	BSW	C	C	72	2	NO
	255/70R16	111	T	/	9	7 1/2J	255	764	300	BSW	C	C	72	2	NO
	265/70R16	112	S	/	9	8J	265	778	300	BSW	C	C	72	2	NO
	215/70R16	100	H	/	9	6 1/2J	215	708	300	BSW	E	C	71	2	NO
	215/65R16	98	H	/	9	6 1/2J	215	686	300	BSW	E	C	71	2	NO
17	215/60R17	96	H	/	9	6 1/2J	215	690	300	BSW	E	C	71	2	NO
	225/65R17	102	S	/	9,2	6 1/2J	225	724	300	BSW	E	E	71	2	NO
	235/65R17	104	S	/	9	7J	235	738	300	BSW	E	C	71	2	NO
	245/65R17	107	S	/	9	7J	245	750	300	BSW	C	C	71	2	NO
	265/65R17	112	S	/	9	8J	265	776	300	BSW	C	C	72	2	NO
	265/70R17	115	T	/	9	8J	265	804	300	BSW	C	C	72	2	NO
	225/65R17	102	H	/	9,2	6 1/2J	225	724	300	BSW	E	E	71	2	NO
	225/65R17	106	H	XL	9,2	6 1/2J	225	724	340	BSW	E	E	71	2	NO
	235/65R17	104	V	/	9	7J	235	738	300	BSW	/	/	/	/	NO
	235/65R17	108	V	XL	9	7J	235	738	340	BSW	/	/	/	/	NO
	235/65R17	104	H	/	9	7J	235	738	300	BSW	E	C	71	2	NO
	245/65R17	111	T	XL	9	7J	245	750	340	BSW	C	C	71	2	NO
	265/65R17	112	T	/	9	8J	265	776	300	BSW	C	C	72	2	NO
18	235/60R18	107	H	XL	9	7J	235	739	340	BSW	C	C	72	2	NO
	265/65R18	114	H	/	9	8J	265	801	300	BSW	C	C	72	2	YES
	235/65R18	106	H	/	9	7J	235	763	300	BSW	/	/	/	/	NO



H/T02 SUV

Light truck and SUV tyre offering excellent endurance and handling.



WEAR RESISTANCE



HANDLING



DRAINAGE



SILENCE



Wet Performance

The tread pattern grooves built into the crown are designed to effectively drain water and offer great traction on wet roads to enhance overall safety.

Longer Life

The tread is composed of a special formula made specifically to increase wear resistance.

Driving Comfort

A varying pitch tread block design provides a comfortable and quiet ride.



Summer Performance

The asymmetric tread pattern improves handling and braking on wet and dry roads.



RIM	SIZE	LI	SR	XL	TREAD DEPTH (mm)	STANDARD RIM	SECTION WIDTH (mm)	OVERALL DIAMETER (mm)	PRESSURE (kpa)	SW	RR	WG	NG Db	NG	Rim Protector
15	255/70R15	108	T	/	9	7 1/2J	255	739	300	BSW	C	C	72	2	YES
	265/70R15	112	T	/	9	8J	265	753	300	BSW	C	C	72	2	YES
16	275/70R16	114	H	/	8,8	8J	275	792	300	BSW	C	C	72	2	YES
17	225/60R17	99	H	/	9	6 1/2J	225	702	300	BSW	C	C	71	2	YES
	235/60R17	102	H	/	9	7J	235	714	300	BSW	C	C	71	2	YES
	235/65R17	104	H	/	9	7J	235	738	300	BSW	C	C	71	2	YES
	245/70R17	110	T	/	9	7J	245	776	300	BSW	C	C	71	2	YES
	255/60R17	106	H	/	8,8	7 1/2J	255	738	300	BSW	C	C	72	2	YES
	275/65R17	115	H	/	9	8J	275	790	300	BSW	C	C	72	2	YES
	285/65R17	116	H	/	9	8 1/2J	285	802	300	BSW	C	C	72	2	YES
	255/65R17	110	H	/	9	7 1/2J	255	764	300	BSW	C	C	72	2	YES
18	225/60R18	100	H	/	8,8	6 1/2J	225	727	300	BSW	C	C	71	2	YES
	235/55R18	104	V	XL	8	7 1/2J	235	715	340	BSW	C	C	72	2	YES
	235/60R18	107	V	XL	9	7J	235	739	340	BSW	C	C	72	2	YES
	245/60R18	105	H	/	9	7J	245	751	300	BSW	C	C	71	2	YES
	255/55R18	105	V	/	8,6	8J	255	737	300	BSW	C	C	72	2	YES
	265/60R18	110	H	/	9	8J	265	775	300	BSW	C	C	72	2	YES
	265/70R18	116	T	/	9	8J	265	829	300	BSW	C	C	72	2	YES
	285/60R18	116	V	/	9	8 1/2J	285	799	300	BSW	/	/	/	/	NO
	285/60R18	116	H	/	9	8 1/2J	285	799	300	BSW	/	/	/	/	NO
	255/70R18	116	H	XL	9	7 1/2J	255	815	340	BSW	/	/	/	/	NO
	255/70R18	116	T	XL	9	7 1/2J	255	815	340	BSW	/	/	/	/	NO
	275/65R18	116	H	XL	9	8J	275	815	340	BSW	/	/	/	/	NO
19	235/55R19	101	V	/	8	7 1/2J	235	741	300	BSW	C	C	71	2	YES
	255/50R19	103	V	/	8,6	8J	255	739	300	BSW	C	C	72	2	YES
	235/55R19	105	V	XL	8	7 1/2J	235	741	340	BSW	C	C	71	2	YES
20	225/35R20	90	W	XL	8,6	8J	225	666	340	BSW	C	C	71	2	YES
	245/45R20	103	W	XL	8,6	8J	245	728	340	BSW	C	C	72	2	YES
	275/55R20	113	H	/	8	8 1/2J	275	810	300	BSW	C	C	72	2	YES
	275/60R20	115	S	/	8,8	8J	275	838	300	BSW	C	C	72	2	YES
	255/50R20	109	V	XL	8,6	8J	255	764	340	BSW	/	/	/	/	YES
	255/55R20	110	V	XL	8,6	8J	255	788	340	BSW	/	/	/	/	YES
21	245/50R20	105	V	XL	8,6	7 1/2J	245	754	340	BSW	/	/	/	/	YES
	275/50R21	113	W	XL	8,6	8 1/2J	275	809	340	BSW	/	/	/	/	YES
22	275/40ZR22	107	Y	XL	8	9 1/2J	275	779	340	BSW	B	C	72	2	YES

1inch=25.4mm | 1kPa=0.142psi | 1KG≈2.2 lbs | XL Extra Load | LI Load Index | SS Speed Symbol

A/T


SUV-AT

This all-terrain tyre offers great traction on wet and muddy terrain, excellent handling, and outstanding driving comfort on both urban off-road and poorly-paved terrain.



Contour Design

The new contour design improves carcass strength to ensure superior carrying capacity, and at the same time enables uniform contact pressure distribution for even tread wear.



Handling Performance

Reinforced central rib enhances maneuverability and high-speed driving performance.



Specially Designed Tread

The wide all-terrain tread pattern contains large blocks and wide grooves for superior driving capability on both on and off-road conditions.



Off-Road Performance

Square shoulder blocks improve ground contact area and improve grip for greater off-road performance.



RIM	SIZE	LI	SR	XL	TREAD DEPTH (mm)	STANDARD RIM	SECTION WIDTH (mm)	OVERALL DIAMETER (mm)	PRESSURE (kPa)	SW	RR	WG	NG Db	NG	Rim Protector
15	LT215/75R15	100/97	R	/	12	6J	215	703	350	OWL	E	B	72	2	NO
	LT235/75R15	104/101	R	/	13	6 1/2J	235	733	350	OWL	E	B	72	2	NO
	LT235/75R15	110/107	R	/	13	6 1/2J	235	733	450	OWL	E	B	72	2	NO
	31x10.50R15LT	109	R	/	13	8 1/2J	/	775	350	OWL	E	B	72	2	NO
16	LT215/85R16	115/112	R	/	12,5	6J	215	772	550	OWL	E	B	72	2	NO
	LT225/70R16	102/99	R	/	12,5	6 1/2J	225	722	350	OWL	E	B	72	2	NO
	LT225/75R16	115/112	R	/	13	6J	225	744	550	OWL	E	B	72	2	NO
	LT235/85R16	120/116	R	/	13	6 1/2J	235	806	550	OWL	C	B	72	2	NO
	LT245/75R16	120/116	S	/	13	7J	245	774	550	OWL	C	B	72	2	NO
	LT265/70R16	110/107	R	/	13	8J	265	778	350	OWL	E	E	72	2	NO
	LT235/70R16	104/101	T	/	12	7J	235	736	350	OWL	E	B	72	2	NO
	LT265/70R16	117/114	R	/	13	8J	265	778	450	OWL	E	E	72	2	NO
	LT265/75R16	123/120	R	/	13	7 1/2J	265	804	550	OWL	/	/	/	/	NO

1inch=25.4mm | 1kPa=0.142psi | 1KG≈2.2 lbs | XL Extra Load | LI Load Index | SS Speed Symbol

SBL: Serrated Black Letter

OWL: Outlined White Letter

M/T

SUV

Specially designed for cross-country enthusiasts.



TRAVERSABLE



CROSS-COUNTRY



HIGH DURABILITY



PUNCTURE RESISTANT



RESILIENT



Toughness

The shield design which extends onto the sidewall protects from abrasions and increases traction on muddy roads.



Off-Road Grip

Deepend grooves effectively discharges mud and allows for better grip on both muddy and rocky roads.



Off-Road Handling

Large shoulder blocks greatly enhance handling on muddy and rocky roads.




RIM	SIZE	LI	SR	XL	TREAD DEPTH (mm)	STANDARD RIM	SECTION WIDTH (mm)	OVERALL DIAMETER (mm)	PRESSURE (kpa)	SW	RR	WG	NG Db	NG	Rim Protector
15	30×9.50R15LT	104	Q	/	15,3	7 1/2J	/	756	350	OWL	/	/	/	/	YES
	31×10.50R15LT	109	Q	/	15,3	8 1/2J	/	781	350	OWL	/	/	/	/	YES
	33×12.50R15LT	108	Q	/	15,3	10J	/	832	250	OWL	/	/	/	/	YES
	35×12.50R15LT	113	Q	/	15,3	10J	/	883	250	OWL	/	/	/	/	YES
	LT235/75R15	104/101	Q	/	15,3	6 1/2J	235	739	350	OWL	/	/	/	/	YES
16	LT235/85R16	120/116	Q	/	15,3	6 1/2J	235	812	550	OWL	/	/	/	/	YES
	LT245/75R16	120/116	Q	/	15,3	7J	245	774	550	OWL	/	/	/	/	YES
17	33×12.50R17LT	114	Q	/	16,3	10J	/	832	350	OWL	/	/	/	/	YES
	35×12.50R17LT	121	Q	/	16,3	10J	/	883	450	OWL	/	/	/	/	YES
	LT265/70R17	121/118	Q	/	15,5	8J	265	810	550	OWL	/	/	/	/	YES
	LT285/70R17	121/118	Q	/	15,5	8 1/2J	285	838	550	OWL	/	/	/	/	YES
18	33×12.50R18LT	118	Q	/	16,3	10J	/	832	450	BSW	/	/	/	/	YES
	35×12.50R18LT	123	K	/	16,7	10J	/	883	450	BSW	/	/	/	/	YES
	35×12.50R18LT	123	Q	/	16,7	10J	/	883	450	BSW	/	/	/	/	YES
20	33×12.50R20LT	114	Q	/	16,3	10J	/	832	450	BSW	/	/	/	/	YES
	35×12.50R20LT	121	Q	/	16,3	10J	/	883	450	BSW	/	/	/	/	YES
	LT305/55R20	121/118	Q	/	16,3	9 1/2J	305	850	450	BSW	/	/	/	/	YES

1inch=25.4mm | 1kPa=0.142psi | 1KG≈2.2.ibs | XL Extra Load | LI Load Index | SS Speed Symbol

OWL Outline White Letter

C02

LTC




Summer Performance

Tread pattern is designed for excellent performance and driving comfort on both wet and dry roads.



Carrying Capacity

A new profile design and strengthened carcass improve the tyre's overall load bearing capabilities.



Overall Performance

Wide and deep grooves increase wear resistance, efficiently drain water, and provide greater handling and driving stability.




RIM	SIZE	LI	SR	XL	TREAD DEPTH (mm)	STANDARD RIM	SECTION WIDTH (mm)	OVERALL DIAMETER (mm)	PRESSURE (kpa)	SW	RR	WG	NG Db	NG	Rim Protector
12	145R12C	80/78	P	/	8	4.00B	145	537	350	BSW	E	B	72	2	NO
	145R12C	86/84	P	/	8	4.00B	145	537	450	BSW	E	B	72	2	NO
	155R12C	83/81	P	/	8	4.50B	155	550	350	BSW	E	B	72	2	NO
	155R12C	88/86	P	/	8	4.50B	155	550	450	BSW	E	B	72	2	NO
	155R13C	85/83	Q	/	8	4.50B	155	578	350	BSW	E	B	72	2	NO
13	165/70R13C	88/86	Q	/	8	5.00B	165	562	375	BSW	E	B	72	2	NO
	165R13C	94/93	S	/	7,6	4.50B	165	596	450	BSW	E	B	72	2	NO
	175R13C	97/95	S	/	8	5.00B	175	610	450	BSW	E	B	72	2	NO
14	175/65R14C	90/88	T	/	8	5J	175	584	375	BSW	E	B	72	2	NO
	175/70R14C	95/93	Q	/	8	5J	175	602	375	BSW	E	B	72	2	NO
	175R14C	99/98	Q	/	9	5J	175	634	450	BSW	E	B	72	2	NO
	185R14C	102/100	Q	/	9	5 1/2J	185	650	450	BSW	C	B	72	2	NO
	195R14C	106/104	Q	/	9	5 1/2J	195	666	450	BSW	C	B	72	2	NO
	195R14C	106/104	Q	/	9	5 1/2J	195	666	450	WR	C	B	72	2	NO
	205/75R14C	109/107	Q	/	9	5 1/2J	205	664	475	WR	C	B	72	2	NO
	205R14C	109/107	R	/	9	6J	205	686	450	BSW	C	B	72	2	NO
	185R15C	103/102	R	/	9,4	5 1/2J	185	674	450	BSW	C	B	72	2	NO
15	195R15C	106/104	R	/	9	5 1/2J	195	690	450	BSW	C	B	72	2	NO
	195R15C	106/104	R	/	9	5 1/2J	195	690	450	WR	C	B	72	2	NO
	205/65R15C	102/100	R	/	9	6J	205	647	375	BSW	C	B	72	2	NO
	205/70R15C	106/104	R	/	9	6J	205	669	450	BSW	C	B	72	2	NO
	215/70R15C	109/107	S	/	10	6 1/2J	215	683	450	BSW	C	B	72	2	NO
	215R15C	109/107	R	/	10	6J	215	725	450	WR	C	B	72	2	NO
	225/70R15C	112/110	R	/	9	6 1/2J	225	697	450	BSW	C	B	72	2	NO
	195/70R15C	104/102	R	/	10	6J	195	655	450	BSW	C	B	72	2	NO
	175R16C	101/99	R	/	9	5J	175	684	450	BSW	E	B	72	2	NO
	185/75R16C	104/102	R	/	9	5J	185	684	475	BSW	C	B	72	2	NO
	195/60R16C	99/97	T	/	9	6J	195	640	375	BSW	C	B	72	2	NO
16	195/75R16C	107/105	R	/	10	5 1/2J	195	698	475	BSW	C	B	72	2	NO
	205/65R16C	107/105	R	/	9	6J	205	672	475	BSW	C	B	72	2	NO
	205/75R16C	110/108	R	/	9	5 1/2J	205	714	475	BSW	C	B	72	2	NO
	205R16C	110/108	R	/	9	6J	205	736	450	BSW	C	B	72	2	NO
	215/60R16C	103/101	T	/	9	6 1/2J	215	664	375	BSW	C	B	72	2	NO
	215/65R16C	109/107	R	/	9	6 1/2J	215	686	475	BSW	C	B	72	2	NO
	215/70R16C	108/106	Q	/	9	6 1/2J	215	708	375	BSW	C	B	72	2	NO
	215/75R16C	116/114	R	/	10,5	6J	215	728	525	BSW	C	B	72	2	NO
	225/65R16C	112/110	R	/	9	6 1/2J	225	698	475	BSW	C	B	72	2	NO
	225/75R16C	121/120	R	/	9	6J	225	744	575	BSW	C	B	72	2	NO
	235/65R16C	115/113	R	/	9	7J	235	712	475	BSW	C	B	72	2	NO
	235/65R16C	121/119	R	/	9	7J	235	712	575	BSW	C	B	72	2	NO
	285/65R16C	125	R	/	9	8 1/2J	285	776	475	BSW	B	B	72	2	NO
	285/65R16C	128	R	/	9	8 1/2J	285	776	525	BSW	B	B	72	2	NO
	195/60R16C	99/97	H	/	9	6J	195	640	375	BSW	C	B	72	2	NO
	195/65R16C	104/102	R	/	9,4	6J	195	660	475	BSW	C	B	72	2	NO
17	225/70R17C	112/110	R	/	9	6 1/2J	225	748	375	BSW	C	B	72	2	NO

1inch=25.4mm | 1kPa=0.142psi | 1KG=2.2 lbs | XL Extra Load | LI Load Index | SS Speed Symbol
BSW Black Sidewall

C01

LTC

Optimized for performance on wet and dry road conditions, the C01 offers improved wear resistance for a longer tread life.



RIM	SIZE	LI	SR	XL	TREAD DEPTH (mm)	STANDARD RIM	SECTION WIDTH (mm)	OVERALL DIAMETER (mm)	PRESSURE (kpa)	SW	RR	WG	NG Db	NG	Rim Protector
15	6.50R15LT	106/101	N	/	10	5.50F	/	730	560	BSW	E	C	70	2	NO
	7.00R15LT	109/105	N	/	10	5.50F	/	750	560	BSW	E	C	70	2	NO
	7.00R15LT	109/105	L	/	10	5.50F	/	750	560	BSW	E	C	70	2	NO
16	7.00R16LT	115/110	N	/	10,5	5.50F	/	775	670	BSW	E	C	70	2	NO
	6.50R16LT	107/102	N	/	10,5	5.50F	/	750	560	BSW	E	C	70	2	NO

1inch=25.4mm | 1kPa=0.142psi | 1KG≈2.2 lbs | XL Extra Load | LI Load Index | SS Speed Symbol



Greater Serviceability

The s-shaped grooves and ribs efficiently drain water and reduce stone retention.



Longer Life

Optimized tread pattern design improves ground contact pressure to promote even tread wear.



WH01

WINTER HP STUDLESS

Designed to offer excellent performance in winter weather conditions.



Fuel Efficiency

The special tread compound reduces rolling resistance for better fuel efficiency.

Winter Performance

A reinforced center rib improves handling and high speed performance while the multiple sipes enhance grip and braking capabilities on snow and ice.

Winter Safety

Zigzagged grooves improve the tyre's self-cleaning capabilities for a safer drive on snow and ice.



RIM	SIZE	LI	SR	XL	TREAD DEPTH (mm)	STANDARD RIM	SECTION WIDTH (mm)	OVERALL DIAMETER (mm)	PRESSURE (kpa)	SW	RR	WG	NG Db	NG	Rim Protector
13	155/65R13	73	T	/	8,5	4.50B	155	532	300	BSW	F	E	71	2	NO
	155/70R13	75	T	/	8,5	4.50B	155	548	300	BSW	F	E	71	2	NO
	165/70R13	79	T	/	8,5	5.00B	165	562	300	BSW	F	E	71	2	NO
	165/70R13	83	T	XL	8,5	5.00B	165	562	340	BSW	F	E	71	2	NO
	175/70R13	82	T	/	8,5	5.00B	175	576	300	BSW	F	E	71	2	NO
14	185/65R14	86	T	/	8,7	5 1/2J	185	596	300	BSW	E	E	71	2	NO
	175/65R14	82	H	/	8,7	5J	175	584	300	BSW	F	E	71	2	NO
	185/60R14	82	T	/	8,5	5 1/2J	185	578	300	BSW	F	E	71	2	NO
	195/60R14	86	T	/	8,5	6J	195	590	300	BSW	E	E	72	2	NO
	165/65R14	79	T	/	8,5	5J	165	570	300	BSW	F	E	71	2	NO
	165/70R14	81	T	/	8,5	5J	165	588	300	BSW	F	E	71	2	NO
	165/70R14	85	T	XL	8,5	5J	165	588	340	BSW	E	E	71	2	NO
	175/70R14	84	T	/	8,5	5J	175	602	300	BSW	E	E	71	2	NO
	175/70R14	88	T	XL	8,2	5J	175	602	340	BSW	E	E	71	2	NO
	185/70R14	92	T	XL	8,7	5 1/2J	185	616	340	BSW	E	E	71	2	NO
	195/70R14	91	H	/	8,7	6J	195	630	300	BSW	E	E	72	2	NO
	205/70R14	98	T	XL	8,7	6J	205	644	340	BSW	E	C	72	2	NO
	175/65R14	86	T	XL	8,7	5J	175	584	340	BSW	E	E	71	2	NO
	185/70R14	88	H	/	8,7	5 1/2J	185	616	300	BSW	E	E	71	2	NO
	195/70R14	95	T	XL	8,7	6J	195	630	340	BSW	E	E	72	2	NO
	185/60R14	82	H	/	8,5	5 1/2J	185	578	300	BSW	F	E	71	2	NO
	185/65R14	86	H	/	8,7	5 1/2J	185	596	300	BSW	E	E	71	2	NO
	205/70R14	98	H	XL	8,7	6J	205	644	300	BSW	E	C	72	2	NO
15	195/55R15	85	H	/	8,5	6J	195	595	300	BSW	E	E	72	2	YES
	195/65R15	91	T	/	8,7	6J	195	635	300	BSW	E	E	72	2	NO
	195/65R15	95	T	XL	8,7	6J	195	635	340	BSW	E	E	72	2	NO
	205/65R15	94	H	/	8,5	6J	205	647	300	BSW	E	C	72	2	NO
	185/65R15	88	T	/	8,7	5 1/2J	185	621	300	BSW	E	E	71	2	NO
	175/65R15	84	H	/	8,7	5J	175	609	300	BSW	E	E	71	2	NO
	185/55R15	86	H	XL	8,5	6J	185	585	340	BSW	E	E	71	2	NO
	185/60R15	88	H	XL	8,5	5 1/2J	185	603	340	BSW	E	E	71	2	NO
	215/65R15	96	H	/	8,5	6 1/2J	215	661	300	BSW	E	C	72	2	YES
	195/50R15	86	H	XL	8,5	6J	195	577	340	BSW	E	E	72	2	YES
	195/60R15	88	T	/	8,5	6J	195	615	300	BSW	E	E	72	2	YES
	205/60R15	91	H	/	8,7	6J	205	627	300	BSW	E	C	72	2	YES
	175/65R15	88	H	XL	8,7	5J	175	609	340	BSW	E	E	71	2	NO
	185/60R15	88	T	XL	8,5	5 1/2J	185	603	340	BSW	E	E	71	2	NO
	185/60R15	84	H	/	8,5	5 1/2J	185	603	300	BSW	E	E	71	2	NO
	185/65R15	92	T	XL	8,7	5 1/2J	185	621	340	BSW	E	E	71	2	NO
	195/50R15	86	V	XL	8,5	6J	195	577	340	BSW	E	E	72	2	YES
	185/65R15	88	H	/	8,7	5 1/2J	185	621	300	BSW	E	E	71	2	NO
	195/60R15	88	H	/	8,5	6J	195	615	300	BSW	E	E	72	2	YES
	195/65R15	91	H	/	8,7	6J	195	635	300	BSW	E	E	72	2	NO
	185/65R15	92	H	XL	8,7	5 1/2J	185	621	340	BSW	E	E	71	2	NO
16	215/60R16	99	H	XL	8,7	6 1/2J	215	664	340	BSW	E	C	72	2	NO
	215/65R16	98	H	/	8,8	6 1/2J	215	686	300	BSW	E	C	72	2	NO
	205/50R16	87	H	/	8,7	6 1/2J	205	612	300	BSW	E	C	72	2	YES
	205/55R16	91	H	/	8,5	6 1/2J	205	632	300	BSW	E	C	72	2	YES
	205/55R16	94	H	XL	8,5	6 1/2J	205	632	340	BSW	E	C	72	2	YES
	195/55R16	87	H	/	8,5	6J	195	620	300	BSW	E	E	72	2	YES
	205/60R16	96	H	XL	8,7	6J	205	652	340	BSW	E	C	72	2	YES
	225/60R16	98	H	/	8,7	6 1/2J	225	676	300	BSW	E	C	72	2	YES
	215/55R16	97	H	XL	8,7	7J	215	642	340	BSW	E	C	72	2	YES
	225/55R16	99	H	XL	8,7	7J	225	654	340	BSW	E	C	72	2	YES
	195/45R16	84	H	XL	8,5	6 1/2J	195	582	340	BSW	E	E	72	2	YES
	205/45R16	87	H	XL	8,7	7J	205	590	340	BSW	E	C	72	2	YES
	205/65R16	95	H	/	8,8	6J	205	672	300	BSW	E	C	72	2	YES
	245/70R16	107	T	/	8,7	7J	245	750	300	BSW	E	C	72	2	NO
	195/55R16	87	V	/	8,5	6J	195	620	300	BSW	E	E	72	2	YES
	205/55R16	94	V	XL	8,5	6 1/2J	205	632	340	BSW	E	C	72	2	YES
	215/55R16	97	V	XL	8,7	7J	215	642	340	BSW	E	C	72	2	YES
	205/45R16	87	V	XL	8,7	7J	205	590	340	BSW	F	C	72	2	YES

WU01

WINTER UHP STUDLESS

WU01 is equipped with a special tread compound and wide tread that offers excellent performance on ice and snow.



SNOW GRIP



SKID RESISTANT



LOW TEMPERATURE



HANDLING



Winter Safety

The tread is able to maintain softness in low temperatures to ensure passenger safety while serrated sipes improve tyre grip on ice and snow.

Winter Performance

The three main pattern grooves provide great handling in extreme winter weather conditions by draining snow and ice.



Winter Grip

The serrated design on the sides of the main grooves help the tyre better grip on ice and snow.



RIM	SIZE	LI	SR	XL	TREAD DEPTH (mm)	STANDARD RIM	SECTION WIDTH (mm)	OVERALL DIAMETER (mm)	PRESSURE (kPa)	SW	RR	WG	NG Db	NG	Rim Protector
14	185/60R14	82	T	/	9,2	5 1/2J	185	578	300	BSW	E	E	71	2	YES
15	195/65R15	95	T	XL	9,2	6J	195	635	340	BSW	E	C	72	2	YES
	205/65R15	94	H	/	9,2	6J	205	647	300	BSW	E	C	72	2	YES
16	205/55R16	91	H	/	9,5	6 1/2J	205	632	300	BSW	E	C	72	2	YES
	215/55R16	97	H	XL	9,5	7J	215	642	340	BSW	E	C	72	2	YES
	215/60R16	99	H	XL	9,5	6 1/2J	215	664	340	BSW	E	C	72	2	YES
	215/65R16	98	H	/	9,5	6 1/2J	215	686	300	BSW	E	C	72	2	YES
	225/55R16	99	H	XL	9,5	7J	225	654	340	BSW	E	C	72	2	YES
	225/60R16	98	H	/	9,5	6 1/2J	225	676	300	BSW	E	C	72	2	YES
17	215/45R17	87	H	/	9,5	7J	215	626	300	BSW	E	C	72	2	YES
	205/50R17	89	H	/	9,5	6 1/2J	205	638	300	BSW	E	C	72	2	YES
	225/45R17	91	H	/	9,5	7 1/2J	225	634	300	BSW	E	C	72	2	YES
	215/55R17	94	H	/	9,5	7J	215	668	300	BSW	E	C	72	2	YES
	205/45R17	88	H	XL	9,5	7J	205	616	340	BSW	F	C	72	2	YES
	225/55R17	97	H	/	9,5	7J	225	680	300	BSW	E	C	72	2	YES
	235/45R17	94	H	/	9,5	8J	235	644	300	BSW	E	C	72	2	YES
	225/65R17	102	S	/	9,5	6 1/2J	225	724	300	BSW	E	C	72	2	YES
	235/55R17	99	H	/	9,5	7 1/2J	235	690	300	BSW	E	C	72	2	YES
	235/65R17	104	S	/	9,5	7J	235	738	300	BSW	E	C	72	2	YES
	225/50R17	98	H	XL	9,5	7J	225	658	340	BSW	E	C	72	2	YES
	225/50R17	98	V	XL	9,5	7J	225	658	340	BSW	E	C	72	2	YES
	205/45R17	88	V	XL	9,5	7J	205	616	340	BSW	E	C	72	2	YES
	205/50R17	89	V	/	9,5	6 1/2J	205	638	300	BSW	E	C	72	2	YES
	225/45R17	91	V	/	9,5	7 1/2J	225	634	300	BSW	E	C	72	2	YES
	225/55R17	97	V	/	9,5	7J	225	680	300	BSW	E	C	72	2	YES
	225/65R17	102	T	/	9,5	6 1/2J	225	724	300	BSW	E	C	72	2	YES
	215/55R17	94	V	/	9,5	7J	215	668	300	BSW	E	C	72	2	YES
	235/45R17	94	V	/	9,5	8J	235	644	300	BSW	E	C	72	2	YES
	215/45R17	87	V	/	9,5	7J	215	626	300	BSW	E	C	72	2	YES
	205/55R17	95	H	XL	9,5	6 1/2J	205	658	340	BSW	E	C	72	2	YES
	265/65R17	112	S	/	9,5	8J	265	776	300	BSW	C	C	72	2	YES
18	225/40R18	92	H	XL	9,5	8J	225	637	340	BSW	E	C	72	2	YES
	215/55R18	99	H	XL	9,5	7J	215	693	340	BSW	E	C	72	2	YES
	235/55R18	104	H	XL	9,5	7 1/2J	235	715	340	BSW	E	C	72	2	YES
	235/40R18	95	V	XL	8,8	8 1/2J	235	645	340	BSW	E	C	72	2	YES
	235/45R18	98	H	XL	9,5	8J	235	669	340	BSW	E	C	72	2	YES
	245/40R18	97	H	XL	9,5	8 1/2J	245	653	340	BSW	E	C	72	2	YES
	245/45R18	100	H	XL	9,5	8J	245	677	340	BSW	E	C	72	2	YES
	255/55R18	109	H	XL	9,5	8J	255	737	340	BSW	C	C	72	2	YES
19	255/50R19	107	H	XL	9,5	8J	255	739	340	BSW	C	C	73	2	YES
	245/55R19	103	V	/	9,5	7 1/2J	245	753	300	BSW	E	C	72	2	YES
	275/35R19	100	H	XL	9,5	9 1/2J	275	675	340	BSW	C	C	73	2	YES
	225/40R19	93	V	XL	8,8	8J	225	663	340	BSW	E	C	72	2	YES
	245/40R19	98	H	XL	9,5	8 1/2J	245	679	340	BSW	E	C	72	2	YES
	255/35R19	96	H	XL	9,5	9J	255	661	340	BSW	E	C	72	2	YES
	255/40R19	100	V	XL	8,8	9J	255	687	340	BSW	E	C	72	2	YES
	245/55R19	103	H	/	9,5	7 1/2J	245	753	300	BSW	E	C	72	2	YES
20	275/40R20	106	V	XL	8,8	9 1/2J	275	728	340	BSW	B	C	73	2	YES
	275/45R20	110	V	XL	8,8	9J	275	756	340	BSW	C	C	73	2	YES
21	295/35R21	107	V	XL	8,8	10 1/2J	295	739	340	BSW	C	C	74	2	YES

WH03

WINTER HP STUDLESS

The WH03 is designed to grealy improve traction, handling, and driving stability for greater overall safety when driving in winter.



SKID RESISTANT



SNOW TRACTION



LOW TEMPERATURE



HANDING



PRESENTABLE



Winter Grip

Large tread blocks and small sipes work together to increase overall grip for more efficient traction and braking on



Winter Safety

The 90 degree angle shoulder improves anti-skid performance for overall increased safety on ice and snow.

Driving Stability

The j-like shoulder design improves grip and driving stability.



RIM	SIZE	LI	SR	XL	TREAD DEPTH (mm)	STANDARD RIM	SECTION WIDTH (mm)	OVERALL DIAMETER (mm)	PRESSURE (kpa)	SW	RR	WG	NG Db	NG	Rim Protector
13	155/65R13	73	T	/	8,5	4.50B	155	532	300	BSW	F	E	71	2	NO
	155/70R13	75	T	/	8,5	4.50B	155	548	300	BSW	F	E	71	2	NO
	175/70R13	82	T	/	8,5	5.00B	175	576	300	BSW	E	E	71	2	NO
	165/70R13	83	T	XL	8,5	5.00B	165	562	340	BSW	E	E	71	2	NO
14	185/70R14	88	H	/	8,5	5 1/2J	185	616	300	BSW	E	E	71	2	NO
	185/65R14	86	T	/	8,5	5 1/2J	185	596	300	BSW	E	E	71	2	NO
	195/70R14	91	H	/	8,5	6J	195	630	300	BSW	C	E	72	2	NO
	165/70R14	85	T	XL	8,5	5J	165	588	340	BSW	E	E	71	2	NO
	175/65R14	82	H	/	8,5	5J	175	584	300	BSW	E	E	71	2	NO
	185/60R14	82	T	/	8,5	5 1/2J	185	578	300	BSW	E	E	71	2	NO
	195/60R14	86	T	/	8,5	6J	195	590	300	BSW	E	E	72	2	NO
	175/70R14	88	T	XL	8,5	5J	175	602	340	BSW	E	E	71	2	NO
	195/65R14	89	T	/	8,5	6J	195	610	300	BSW	C	E	72	2	NO
	205/70R14	98	H	XL	8,5	6J	205	644	340	BSW	C	E	72	2	NO
15	195/55R15	85	H	/	8,5	6J	195	595	300	BSW	E	E	72	2	YES
	185/55R15	86	H	XL	8,5	6J	185	585	340	BSW	E	E	71	2	YES
	185/60R15	88	H	XL	8,5	5 1/2J	185	603	340	BSW	E	E	71	2	NO
	185/65R15	88	T	/	8,5	5 1/2J	185	621	300	BSW	E	E	71	2	NO
	195/65R15	91	T	/	8,5	6J	195	635	300	BSW	C	E	72	2	NO
	195/60R15	88	T	/	8,5	6J	195	615	300	BSW	E	E	72	2	NO
	205/65R15	94	H	/	8,5	6J	205	647	300	BSW	C	E	72	2	NO
	205/70R15	96	T	/	8,5	6J	205	669	300	BSW	C	E	72	2	NO
	215/65R15	96	H	/	8,5	6 1/2J	215	661	300	BSW	C	E	72	2	NO
	215/70R15	98	T	/	8,5	6 1/2J	215	683	300	BSW	C	E	72	2	NO
16	215/75R15	100	S	/	10,5	6J	215	703	300	BSW	C	E	72	2	NO
	235/75R15	109	S	XL	10,5	6 1/2J	235	733	340	BSW	C	C	72	2	NO
	205/60R16	96	H	XL	8,5	6J	205	652	340	BSW	C	E	72	2	NO
	215/65R16	98	H	/	8,5	6 1/2J	215	686	300	BSW	C	E	72	2	NO
	205/55R16	91	H	/	8,5	6 1/2J	205	632	300	BSW	C	E	72	2	NO
17	215/60R16	99	H	XL	8,5	6 1/2J	215	664	340	BSW	C	E	72	2	NO
	215/55R17	94	H	/	8,5	7J	215	668	300	BSW	C	E	72	2	YES
18	235/45R17	94	H	/	8,5	8J	235	644	300	BSW	C	C	72	2	NO
	235/60R18	107	T	XL	10,5	7J	235	739	340	BSW	C	C	72	2	NO

WH02

WINTER HP STUDDABLE

The newly developed WH02 is a studdable winter tyre for your car or SUV. The trinity pattern design is made up of a compound that enhances driving safety and performance in extreme winter weather conditions.



Winter Safety

The tread compound helps the tyre maintain softness in low temperatures to improve driving safety.

Winter Grip

The varied arrangement of studs, grooves, and sipes improve grip on ice and snow.



Widened Driving Surface and Improved Crown Arc

The larger contact area provides a more stable ride and improves skidding resistance which increases overall driving safety.

RIM	SIZE	LI	SR	XL	TREAD DEPTH (mm)	STANDARD RIM	SECTION WIDTH (mm)	OVERALL DIAMETER (mm)	PRESSURE (kpa)	SW	RR	WG	NG Db	NG	Rim Protector
13	175/70R13	82	T	/	9,9	5.00B	175	576	300	BSW	E	F	71	2	NO
14	175/65R14	82	H	/	9,9	5J	175	584	300	BSW	E	F	71	2	NO
	185/65R14	86	T	/	9,9	5 1/2J	185	596	300	BSW	E	F	71	2	NO
	175/70R14	88	T	XL	9,9	5J	175	602	340	BSW	E	F	71	2	NO
	185/70R14	92	T	XL	9,9	5 1/2J	185	616	340	BSW	E	F	71	2	NO
15	205/65R15	94	H	/	9,9	6J	205	647	300	BSW	C	F	72	2	NO
	205/70R15	96	T	/	9,9	6J	205	669	300	BSW	C	F	72	2	NO
	185/65R15	88	T	/	9,9	5 1/2J	185	621	300	BSW	E	F	71	2	NO
	195/60R15	88	T	/	9,9	6J	195	615	300	BSW	E	F	72	2	NO
	195/65R15	91	T	/	9,9	6J	195	635	300	BSW	C	F	72	2	NO
16	205/55R16	91	H	/	9,9	6 1/2J	205	632	300	BSW	C	F	72	2	YES
	205/60R16	96	H	XL	9,9	6J	205	652	340	BSW	C	F	72	2	NO
	215/65R16	98	H	/	9,9	6 1/2J	215	686	300	BSW	C	F	72	2	NO
	215/60R16	99	H	XL	9,9	6 1/2J	215	664	340	BSW	C	F	72	2	NO
	215/70R16	100	S	/	9,9	6 1/2J	215	708	300	BSW	C	F	72	2	NO
17	265/65R17	112	S	/	9,9	8J	265	776	300	BSW	C	F	73	2	NO
	225/65R17	102	S	/	9,9	6 1/2J	225	724	300	BSW	C	F	72	2	NO
	235/65R17	104	S	/	9,9	7J	235	738	300	BSW	C	F	72	2	NO
	215/50R17	91	T	/	9,9	7J	215	648	300	BSW	C	F	72	2	YES
	215/60R17	96	S	/	9,9	6 1/2J	215	690	300	BSW	C	F	72	2	NO

STUD SIZE TSMI#12

1inch=25.4mm | 1kPa=0.142psi | 1KG≈2.2 lbs | XL Extra Load | LI Load Index | SS Speed Symbol

WH12

WINTER HP STUDDABLE

The WH12 is a studdable winter tyre designed for drivers that demand maximum traction in severe winter weather conditions, letting you outperform the elements to get more out of the winter season.



SNOW GRIP



SKID RESISTANT



SNOW TRACTION



LOW TEMPERATURE



V-shaped Tread Design

Improved grip on ice and snow, skid resistance, and effectively reduces noise emissions.



Sipe Design

Optimized sipe design ensures great grip on ice and snow.



Improved Studded Technology

12 rows of studs are designed to maximize grip and traction performance for safer driving in winter weather.



Special Buffer Layer

Special rubber buffer layer at the bottom of the stud absorbs the impact force of snow to prevent studs from falling out.

Innovative Square Design

Increases the ground contact area of the tyre to effectively improve grip performance and increase skid resistance.



RIM	SIZE	LI	SR	XL	TREAD DEPTH (mm)	STANDARD RIM	SECTION WIDTH (mm)	OVERALL DIAMETER (mm)	PRESSURE (kpa)	SW	RR	WG	NG Db	NG	Rim Protector
13	155/70R13	75	T	/	10	4.50B	155	548	300	BSW	F	E	71	2	NO
	155/80R13	79	T	/	10	4.50B	155	578	300	BSW	F	E	71	2	NO
	165/70R13	79	T	/	10	5.00B	165	562	300	BSW	F	E	71	2	NO
	175/70R13	82	T	/	10	5.00B	175	576	300	BSW	F	E	71	2	NO
14	155/65R14	75	T	/	10	4 1/2J	155	558	300	BSW	F	E	71	2	NO
	165/65R14	79	T	/	10	5J	165	570	300	BSW	F	E	71	2	NO
	175/65R14	82	T	/	10	5J	175	584	300	BSW	F	E	71	2	NO
	175/70R14	84	T	/	10	5J	175	602	300	BSW	F	E	71	2	NO
	185/60R14	82	T	/	10	5 1/2J	185	578	300	BSW	F	E	71	2	NO
	185/65R14	86	T	/	10	5 1/2J	185	596	300	BSW	E	E	71	2	NO
	185/70R14	88	T	/	10	5 1/2J	185	616	300	BSW	E	E	71	2	NO
	185/60R15	84	T	/	10	5 1/2J	185	603	300	BSW	F	E	71	2	NO
15	185/65R15	88	T	/	10	5 1/2J	185	621	300	BSW	E	E	71	2	NO
	185/55R15	82	T	/	10	6J	185	585	300	BSW	F	E	71	2	NO
	195/60R15	88	T	/	10	6J	195	615	300	BSW	E	E	72	2	NO
	195/65R15	91	T	/	10	6J	195	635	300	BSW	E	E	72	2	NO
	205/65R15	94	T	/	10	6J	205	647	300	BSW	E	E	72	2	NO
	215/70R15	98	T	/	10	6 1/2J	215	683	300	BSW	E	E	72	2	NO
	215/65R15	96	T	/	10	6 1/2J	215	661	300	BSW	E	E	72	2	NO
	205/70R15	96	T	/	10	6J	205	669	300	BSW	E	E	72	2	NO
	175/65R15	84	T	/	10	5J	175	609	300	BSW	F	E	71	2	NO
	235/75R15	105	S	/	11	6 1/2J	235	733	300	BSW	C	E	72	2	NO
	205/60R16	92	T	/	10	6J	205	652	300	BSW	E	E	72	2	NO
	205/55R16	91	T	/	10	6 1/2J	205	632	300	BSW	E	E	72	2	NO
	225/60R16	98	T	/	10	6 1/2J	225	676	300	BSW	E	E	72	2	NO
	215/60R16	95	T	/	10	6 1/2J	215	664	300	BSW	E	E	72	2	NO
	215/55R16	97	H	XL	10	7J	215	642	340	BSW	E	E	72	2	NO
16	215/65R16	98	T	/	10	6 1/2J	215	686	300	BSW	E	E	72	2	NO
	225/65R16	100	T	/	10	6 1/2J	225	698	300	BSW	E	E	72	2	NO
	215/70R16	100	T	/	11	6 1/2J	215	708	300	BSW	E	E	72	2	NO
	205/65R16	95	T	/	10	6J	205	672	300	BSW	E	E	72	2	NO
	225/70R16	103	H	/	11	6 1/2J	225	722	300	BSW	E	E	72	2	NO
	235/70R16	106	T	/	11	7J	235	736	300	BSW	C	E	72	2	NO
	245/70R16	107	T	/	11	7J	245	750	300	BSW	C	E	72	2	NO
	245/75R16	111	S	/	11	7J	245	774	300	BSW	C	E	72	2	NO
	205/50R16	87	T	/	10	6 1/2J	205	612	300	BSW	E	E	72	2	YES
	215/60R17	96	H	/	10	6 1/2J	215	690	300	BSW	E	E	72	2	NO
	225/45R17	94	H	XL	10	7 1/2J	225	634	340	BSW	E	E	72	2	YES
	225/50R17	98	H	XL	10	7J	225	658	340	BSW	E	E	72	2	YES
	225/60R17	99	H	/	10	6 1/2J	225	702	300	BSW	E	E	72	2	NO
	235/55R17	99	V	/	10	7 1/2J	235	690	300	BSW	E	E	72	2	YES
	265/65R17	112	T	/	11	8J	265	776	300	BSW	C	E	73	2	NO
	235/60R17	102	H	/	10	7J	235	714	300	BSW	E	E	72	2	NO
	215/50R17	95	T	XL	10	7J	215	648	340	BSW	E	E	72	2	YES
17	235/65R17	104	T	/	11	7J	235	738	300	BSW	C	E	72	2	NO
	265/70R17	115	S	/	11	8J	265	804	300	BSW	C	E	73	2	NO
	225/65R17	102	S	/	11	6 1/2J	225	724	300	BSW	E	E	72	2	NO
	245/65R17	107	T	/	11	7J	245	750	300	BSW	C	E	72	2	NO
	215/65R17	99	T	/	11	6 1/2J	215	712	300	BSW	E	E	72	2	NO
	215/55R17	94	T	/	11	7J	215	668	300	BSW	E	E	72	2	NO
	225/55R17	97	T	/	11	7J	225	680	300	BSW	E	E	72	2	NO
	215/45R17	91	T	XL	10	7J	215	626	340	BSW	E	E	72	2	YES
	235/45R17	97	T	XL	10	8J	235	644	340	BSW	E	E	72	2	YES
	225/40R18	92	H	XL	10	8J	225	637	340	BSW	E	E	72	2	YES
	235/60R18	103	H	/	10	7J	235	739	300	BSW	E	E	72	2	YES
	255/55R18	105	V	/	10	8J	255	737	300	BSW	C	E	73	2	YES
18	225/60R18	100	T	/	10	6 1/2J	225	727	300	BSW	E	E	72	2	YES
	225/55R18	98	T	/	10	7J	225	705	300	BSW	E	E	72	2	YES
	235/55R18	100	H	/	11	7 1/2J	235	715	300	BSW	E	E	72	2	NO
	225/45R18	95	T	XL	10	7 1/2J	225	659	340	BSW	E	E	72	2	YES
	245/45R18	100	H	XL	10	8J	245	677	340	BSW	E	E	72	2	YES
	235/50R18	101	T	XL	10	7 1/2J	235	693	340	BSW	E	E	72	2	YES
	215/55R18	95	T	/	10	7J	215	693	300	BSW	E	E	72	2	YES
	235/55R19	101	H	/	10	7 1/2J	235	741	300	BSW	E	E	72	2	YES
	255/50R19	107	H	XL	10	8J	255	739	340	BSW	C	E	73	2	YES
	275/40R20	106	H	XL	11	9 1/2J	275	728	340	BSW	C	E	73	2	YES

WC01

WINTER LTC STUDLESS

A winter tyre product specifically designed for commercial light trucks.



Winter Handling

The wide and jagged groove design efficiently drains snow and water out of the tyre to improve handling in winter weather.

Winter Performance

The intersecting blocks, grooves, and sipes allow for more effective braking on ice and snow.

Winter Braking

The precision cut sipes enhance grip on ice and snow to allow for a safer driving experience.



Driving Comfort

The tread width and block patterns ensure a secure contact with the road surface to improve driving comfort.



RIM	SIZE	LI	SR	XL	TREAD DEPTH (mm)	STANDARD RIM	SECTION WIDTH (mm)	OVERALL DIAMETER (mm)	PRESSURE (kpa)	SW	RR	WG	NG Db	NG	Rim Protector
12	155R12C	88/86	R	/	8,7	4.50B	155	550	450	BSW	E	C	71	2	NO
13	155R13C	85/83	R	/	8,7	4.50B	155	578	350	BSW	E	C	71	2	NO
14	185R14C	102/100	R	/	9,6	5 1/2J	185	650	450	BSW	E	C	71	2	NO
	195R14C	106/104	R	/	10	5 1/2J	195	666	450	BSW	E	C	71	2	NO
15	195R15C	106/104	R	/	10	5 1/2J	195	690	450	BSW	E	C	71	2	NO
	205/70R15C	106/104	S	/	10	6J	205	669	450	BSW	E	C	71	2	NO
	225/70R15C	112/110	S	/	10	6 1/2J	225	697	450	BSW	E	C	71	2	NO
	195/70R15C	104/102	S	/	10	6J	195	655	450	BSW	E	C	71	2	NO
	215/70R15C	113/111	S	/	10	6 1/2J	215	683	525	BSW	E	C	71	2	NO
16	195/60R16C	99/97	T	/	10,2	6J	195	640	375	BSW	C	C	71	2	NO
	235/65R16C	115/113	R	/	10,2	7J	235	712	475	BSW	E	E	71	2	NO
	285/65R16C	128	N	/	10,2	8 1/2J	285	776	525	BSW	C	E	75	2	NO
	205/75R16C	113/111	R	/	10	5 1/2J	205	714	525	BSW	C	C	71	2	NO
	215/75R16C	116/114	R	/	10	6J	215	728	525	BSW	E	C	71	2	NO
	185/75R16C	104/102	R	/	9,6	5J	185	684	475	BSW	E	C	71	2	NO
	195/75R16C	107/105	R	/	10	5 1/2J	195	698	475	BSW	C	C	71	2	NO
	205/65R16C	107/105	T	/	10	6J	205	672	475	BSW	E	C	71	2	NO
	215/60R16C	108/106	T	/	10	6 1/2J	215	664	475	BSW	E	C	71	2	NO
	215/65R16C	109/107	T	/	10	6 1/2J	215	686	475	BSW	E	C	71	2	NO
	225/75R16C	118/116	R	/	10	6J	225	744	525	BSW	E	C	71	2	NO
	195/65R16C	104/102	T	/	10	6J	195	660	475	BSW	E	C	71	2	NO
	225/65R16C	112/110	T	/	10	6 1/2J	225	698	475	BSW	E	C	71	2	NO

1inch=25.4mm | 1kPa=0.142psi | 1KG=2.2 lbs | XL Extra Load | LI Load Index | SS Speed Symbol

WCS01

WINTER LTC STUDDABLE

The WCS01 is a studdable winter tyre designed for drivers that demand maximum traction in severe winter weather conditions, letting you outperform the elements to get more out of the winter season.



SNOW GRIP



SKID RESISTANT



SNOW TRACTION



LOW TEMPERATURE



V-shaped Tread Design

Improved grip on ice and snow, skid resistance, and effectively reduces noise emissions.

Sipe Design

Optimized depth and length of sipes maintain tread rigidity and greatly enhance grip and handling.



Improved Studded Technology

12 rows of studs are designed to maximize grip and traction performance for safer driving in winter weather.



Special Buffer Layer

Special rubber buffer layer at the bottom of the stud absorbs the impact force of snow to prevent studs from falling out.



Innovative Square Design

Increases the ground contact area of the tyre to effectively improve grip performance and increase skid resistance.



RIM	SIZE	LI	SR	XL	TREAD DEPTH (mm)	STANDARD RIM	SECTION WIDTH (mm)	OVERALL DIAMETER (mm)	PRESSURE (kpa)	SW	RR	WG	NG Db	NG	Rim Protector
14	175/65R14C	90/88	Q	/	10	5J	175	584	375	BSW	E	C	70	2	NO
	185R14C	102/100	Q	/	10	5 1/2J	185	650	450	BSW	E	C	70	2	NO
15	195/70R15C	104/102	Q	/	10,5	6J	195	655	450	BSW	E	C	70	2	NO
	225/70R15C	112/110	Q	/	10,5	6 1/2J	225	697	450	BSW	C	C	72	2	NO
	205/70R15C	106/104	R	/	10,5	6J	205	669	450	BSW	C	C	71	2	NO
	215/70R15C	109/107	R	/	10,5	6 1/2J	215	683	450	BSW	C	C	72	2	NO
16	205/65R16C	107/105	Q	/	10,5	6J	205	672	475	BSW	C	C	71	2	NO
	195/60R16C	99/97	S	/	10,5	6J	195	640	375	BSW	E	C	70	2	NO
	215/65R16C	109/107	R	/	10,5	6 1/2J	215	686	475	BSW	C	C	72	2	NO
	195/65R16C	104/102	R	/	10,5	6J	195	660	475	BSW	E	C	70	2	NO
	195/75R16C	107/105	Q	/	10,5	5 1/2J	195	698	475	BSW	C	C	70	2	NO
	235/65R16C	115/113	R	/	10,5	7J	235	712	475	BSW	C	C	73	2	NO
	205/75R16C	110/108	R	/	10,5	5 1/2J	205	714	475	BSW	C	C	71	2	NO
	215/75R16C	113/111	R	/	10,5	6J	215	728	475	BSW	C	C	72	2	NO
	225/65R16C	112/110	R	/	10,5	6 1/2J	225	698	475	BSW	C	C	73	2	NO

1inch=25.4mm | 1kPa=0.142psi | 1KG≈2.2 lbs | XL Extra Load | LI Load Index | SS Speed Symbol



NOTES

[illegible]

NOTES

[illegible]